

اسئلة سابقة ..

ديناميكا

FOLLOW US :



[Mech.MuslimEngineer.Net](http://www.Mech.MuslimEngineer.Net)



[FB.com/Groups/Mid.Group](https://www.facebook.com/Groups/Mid.Group)



0789434018



[MechFet](https://twitter.com/MechFet)



[youtube.com/MechanicalFet](https://www.youtube.com/MechanicalFet)



لجنة الميكانيك - الإتجاه الإسلامي



BAU-FE-MED

Dynamics- Final Exam-Jan-2013

Student Name: _____

د. سليمان التوماني

Instructor name: 3'30-5

Select the right answer for each question below:


Q1: In the pulley system shown aside ($m_A = 0.5 m_B$). Neglecting friction and pulleys mass which of the following is true:

- a- block B will experience a larger acceleration magnitude than block A.
 b- block B will experience an equal acceleration magnitude to block A.
 c- block B motion has no specific relation to that of block A.
 d- block A will experience a larger acceleration magnitude than block B.



Q2 The pile P has a mass of 800 kg and is being driven into loose sand using the 400-kg hammer C which is dropped a distance of 0.5 m from the top of the pile. Determine the initial speed (m/s) of the pile just after it is struck by the hammer. The coefficient of restitution between the hammer and the pile $e=0.3$. Neglect the impulses due to the weights of the pile and hammer and the impulse due to the sand during the impact.

- b) 0.94 b) 0.626 c) 1.25 d) 1.35

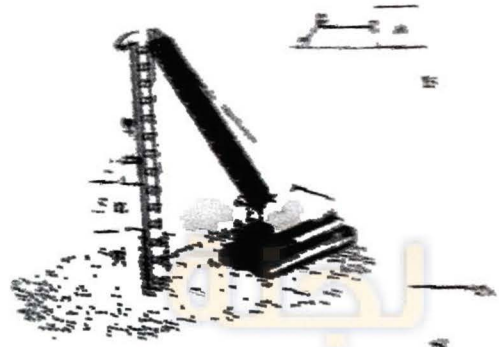

Q3: The 4.5-Mg engine is suspended from a spreader beam AB having a negligible mass and is hoisted by a crane which gives it an acceleration of 4 m/s^2 when it has a velocity of 4 m/s . Determine the force (N) in chains CB and CA during the lift.

- a) 35879 b) 38500 c) 41075 d) 1145



Q4: Roller coasters are designed so that riders will not experience a normal force that is more than 4.5 times their weight against the seat of the car. Determine the smallest radius of curvature ρ (m) of the track at its lowest point if the car has a speed of 10 m/s at the crest of the drop. Neglect friction.

- a) 88.3 b) 92.07 c) 65.77 d) 2258.2




Q5: If bar AB has an angular velocity $\omega_{AB} = 5 \text{ rad/s}$, determine the velocity of the slider block C at the instant shown.



لجنة الميكانيك - الإتجاه الإسلامي

أسئلة امتحان الديناميكا للفصل الأول 2011-2012

13-50. At the instant shown, the 50-kg projectile travels in the vertical plane with a speed of $v = 40\text{ m/s}$. Determine the tangential component of its acceleration and the radius of curvature ρ of its trajectory at this instant.



Free-Body Diagram: The free-body diagram of the projectile is shown in Fig. (a). Here, a_n must be directed towards the center of curvature of the trajectory (positive n axis).

Equations of Motion: Here, $a_n = \frac{v^2}{\rho} = \frac{40^2}{\rho}$. By referring to Fig. (a),

$$+\nearrow \Sigma F_t = ma_t; \quad -50(9.81) \sin 30^\circ = 50a_t$$


$$a_t = -4.905 \text{ m/s}^2$$

Ans.


$$+\searrow \Sigma F_n = ma_n; \quad 50(9.81) \cos 30^\circ = 50\left(\frac{40^2}{\rho}\right)$$

$$\rho = 188 \text{ m}$$

Ans.

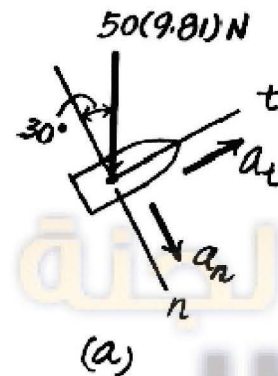

16-74. At the instant shown, the truck travels to the right at 3 m/s, while the pipe rolls counterclockwise at $\omega = 8 \text{ rad/s}$ without slipping at B . Determine the velocity of the pipe's center G .

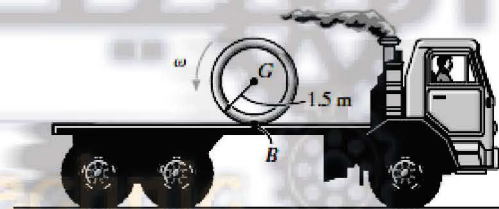

$$\mathbf{v}_G = \mathbf{v}_B + \mathbf{v}_{G/B}$$

$$\begin{bmatrix} v_G \\ \end{bmatrix} = \begin{bmatrix} 3 \\ \end{bmatrix} + \begin{bmatrix} 1.5(8) \\ \end{bmatrix}$$

$$v_G = 9 \text{ m/s} \leftarrow$$

Ans.

Also:



$$\mathbf{v}_G = \mathbf{v}_B + \omega \times \mathbf{r}_{G/B}$$

$$v_G \mathbf{i} = 3 \mathbf{i} + (8 \mathbf{k}) \times (1.5 \mathbf{j})$$


$$v_G = 3 - 12$$

$$v_G = -9 \text{ m/s} = 9 \text{ m/s} \leftarrow$$

Ans.



*16-48. The man pulls on the rope at a constant rate of 0.5 m/s. Determine the angular velocity and angular acceleration of beam AB when $\theta = 60^\circ$. The beam rotates about A . Neglect the thickness of the beam and the size of the pulley.

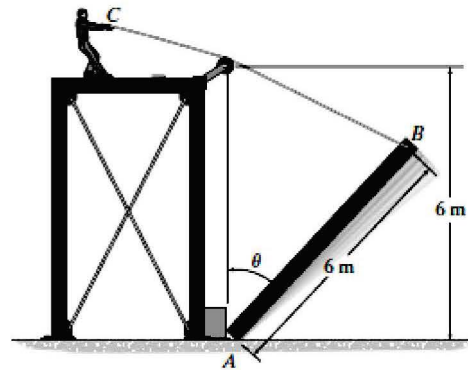

Position Coordinates: Applying the law of cosines to the geometry,

$$s^2 = 6^2 + 6^2 - 2(6)(6) \cos \theta$$

$$s^2 = (72 - 72 \cos \theta) \text{ m}^2$$

Time Derivatives: Taking the time derivative,

$$2s\dot{s} = 0 - 72(-\sin \theta \dot{\theta})$$

$$s\dot{s} = 36 \sin \theta \dot{\theta}$$

(1)


Here, $\dot{s} = -0.5$ m/s since \dot{s} acts in the negative sense of s . When $\theta = 60^\circ$, $s = \sqrt{72 - 72 \cos 60^\circ} = 6$ m. Thus, Eq. (1) gives

$$6(-0.5) = 36 \sin 60^\circ \dot{\theta}$$

$$\omega = \dot{\theta} = -0.09623 \text{ rad/s} = -0.0962 \text{ rad/s}$$

Ans.

15-14. The 10-kg smooth block moves to the right with a velocity of $v_0 = 3$ m/s when force F is applied. If the force varies as shown in the graph, determine the velocity of the block when $t = 4.5$ s.

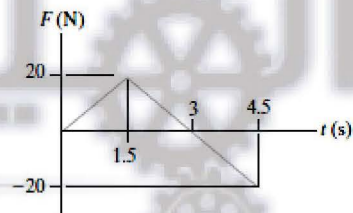

Principle of Impulse and Momentum: The impulse generated by force F during

$0 \leq t \leq 4.5$ is equal to the area under the F vs. t graph, i.e.,


$$I = \int F dt = \frac{1}{2}(20)(3 - 0) + \left[-\frac{1}{2}(20)(4.5 - 3) \right] = 15 \text{ N}\cdot\text{s.}$$

Referring to the free-body diagram of the block shown in Fig. a,


$$\left(\rightarrow \right) \quad m(v_1)_x + \sum \int_{t_1}^{t_2} F_x dt = m(v_2)_x$$

$$10(3) + 15 = 10v$$


$$v = 4.50 \text{ m/s}$$



Ans.



*15-96. The ball B has a mass of 10 kg and is attached to the end of a rod whose mass can be neglected. If the shaft is subjected to a torque $M = (2t^2 + 4) \text{ N} \cdot \text{m}$, where t is in seconds, determine the speed of the ball when $t = 2 \text{ s}$. The ball has a speed $v = 2 \text{ m/s}$ when $t = 0$.

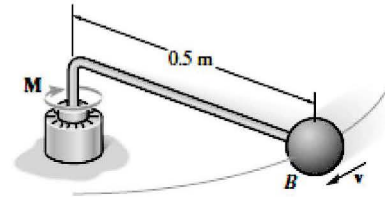


Principle of Angular Impulse and Momentum: Applying Eq. 15-22, we have

$$(H_z)_1 + \sum \int_{t_1}^{t_2} M_z dt = (H_z)_2$$


$$0.5(10)(2) + \int_0^{2\text{s}} (2t^2 + 4) dt = 0.5(10)v$$

$$v = 4.67 \text{ m/s}$$

Ans.



*16-9. When only two gears are in mesh, the driving gear A and the driven gear B will always turn in opposite directions. In order to get them to turn in the *same direction* an idler gear C is used. In the case shown, determine the angular velocity of gear B when $t = 5 \text{ s}$, if gear A starts from rest and has an angular acceleration of $\alpha_A = (3t + 2) \text{ rad/s}^2$, where t is in seconds.

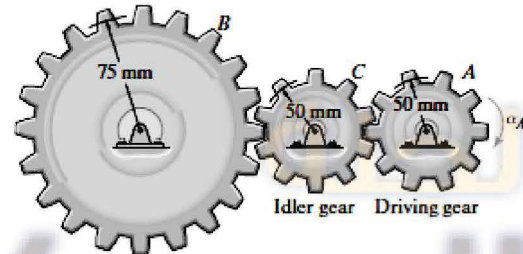

$$d\omega = \alpha dt$$

$$\int_0^{\omega_A} d\omega_A = \int_0^t (3t + 2) dt$$

$$\omega_A = 1.5t^2 + 2t|_{t=5} = 47.5 \text{ rad/s}$$

$$(47.5)(50) = \omega_C(50)$$


$$\omega_C = 47.5 \text{ rad/s}$$

$$\omega_B(75) = 47.5(50)$$

$$\omega_B = 31.7 \text{ rad/s}$$

Ans.

F16-19. At the instant shown, end A of the rod has the velocity and acceleration shown. Determine the angular acceleration of the rod and acceleration of end B of the rod.

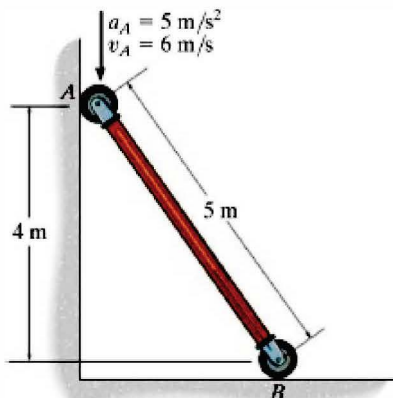

F16-19

$$\text{F16-19. } \omega = \frac{v_A}{r_{A/C}} = \frac{6}{3} = 2 \text{ rad/s}$$

$$\mathbf{a}_B = \mathbf{a}_A + \boldsymbol{\alpha} \times \mathbf{r}_{B/A} - \omega^2 \mathbf{r}_{B/A}$$

$$a_B \mathbf{i} = -5\mathbf{j} + (\alpha \mathbf{k}) \times (3\mathbf{i} - 4\mathbf{j}) - 2^2(3\mathbf{i} - 4\mathbf{j})$$

$$a_B \mathbf{i} = (4\alpha - 12)\mathbf{i} + (3\alpha + 11)\mathbf{j}$$

$$a_B = 4\alpha - 12$$

$$0 = 3\alpha + 11$$

$$\alpha = -3.67 \text{ rad/s}^2$$

$$a_B = -26.7 \text{ m/s}^2$$

Ans.

Ans.



لجنة الميكانيك - الإتجاه الإسلامي

16-79. If the ring gear D is held fixed and link AB rotates with an angular velocity of $\omega_{AB} = 10 \text{ rad/s}$, determine the angular velocity of gear C .

Rotation About a Fixed Axis: Since link AB rotates about a fixed axis, Fig. a , the velocity of the center B of gear C is

$$v_B = \omega_{AB} r_{AB} = 10(0.375) = 3.75 \text{ m/s}$$



General Plane Motion: Since gear D is fixed, the velocity of the contact point P between the gears is zero. Applying the relative velocity equation and referring to the kinematic diagram of gear C shown in Fig. b ,

$$\begin{aligned} v_B &= v_P + \omega_C \times r_{B/P} \\ -3.75\mathbf{i} &= \mathbf{0} + (\omega_C \mathbf{k}) \times (0.125\mathbf{j}) \\ -3.75\mathbf{i} &= -0.125\omega_C \mathbf{i} \end{aligned}$$

Thus,

$$\begin{aligned} -3.75 &= -0.125\omega_C \\ \omega_C &= 30 \text{ rad/s} \end{aligned}$$

Ans.

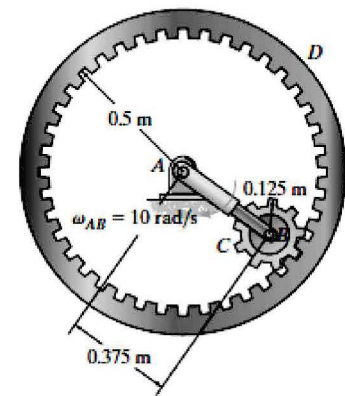

(a)

16-155. Water leaves the impeller of the centrifugal pump with a velocity of 25 m/s and acceleration of 30 m/s^2 , both measured relative to the impeller along the blade line AB . Determine the velocity and acceleration of a water particle at A as it leaves the impeller at the instant shown. The impeller rotates with a constant angular velocity of $\omega = 15 \text{ rad/s}$.

Reference Frame: The xyz rotating reference frame is attached to the impeller and coincides with the XYZ fixed reference frame at the instant considered, Fig. a . Thus, the motion of the xyz frame with respect to the XYZ frame is

$$v_O = a_O = \mathbf{0} \quad \omega = [-15\mathbf{k}] \text{ rad/s} \quad \dot{\omega} = \mathbf{0}$$

The motion of point A with respect to the xyz frame is

$$\begin{aligned} r_{A/O} &= [0.3\mathbf{j}] \text{ m} \\ (v_{rel})_{xyz} &= (-25 \cos 30^\circ \mathbf{i} + 25 \sin 30^\circ \mathbf{j}) = [-21.65\mathbf{i} + 12.5\mathbf{j}] \text{ m/s} \\ (a_{rel})_{xyz} &= (-30 \cos 30^\circ \mathbf{i} + 30 \sin 30^\circ \mathbf{j}) = [-25.98\mathbf{i} + 15\mathbf{j}] \text{ m/s}^2 \end{aligned}$$

Velocity: Applying the relative velocity equation.



$$\begin{aligned} v_A &= v_O + \omega \times r_{A/O} + (v_{rel})_{xyz} \\ &= \mathbf{0} + (-15\mathbf{k}) \times (0.3\mathbf{j}) + (-21.65\mathbf{i} + 12.5\mathbf{j}) \\ &= [-17.2\mathbf{i} + 12.5\mathbf{j}] \text{ m/s} \end{aligned}$$

Ans.

Acceleration: Applying the relative acceleration equation,

$$\begin{aligned} a_A &= a_O + \dot{\omega} \times r_{A/O} + \omega \times (\omega \times r_{A/O}) + 2\omega \times (v_{rel})_{xyz} + (a_{rel})_{xyz} \\ &= \mathbf{0} + (-15\mathbf{k}) \times [(-15\mathbf{k}) \times (0.3\mathbf{j})] + 2(-15\mathbf{k}) \times (-21.65\mathbf{i} + 12.5\mathbf{j}) + (-25.98\mathbf{i} + 15\mathbf{j}) \\ &= [349\mathbf{i} + 597\mathbf{j}] \text{ m/s}^2 \end{aligned}$$

Ans.

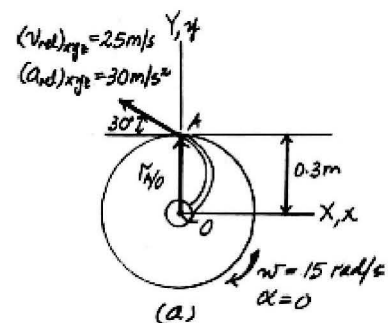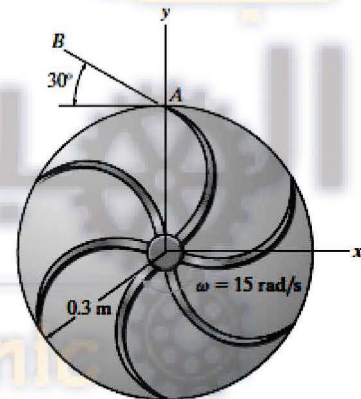

(a)




AL-Balqa Applied University
Faculty of Engineering Technology

Mechanical department
Final exam – Dynamics
2008-2009
Dr. Salameh Swalha


Q1 (12 point)

The 2-kg collar is attached to a spring that has an unstretched length of 3 m. If the collar is drawn to point B and released from rest, determine its speed when it arrives at point A .

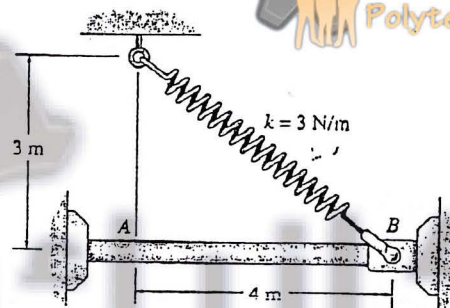


Q2(13 point)

The double pulley consists of two parts that are attached to one another. It has a weight of 50 lb and a centroidal radius of gyration of $k_O = 0.6 \text{ ft}$ and is turning with an angular velocity of 20 rad/s clockwise. Determine the kinetic energy of the system. Assume that neither cable slips on the pulley.

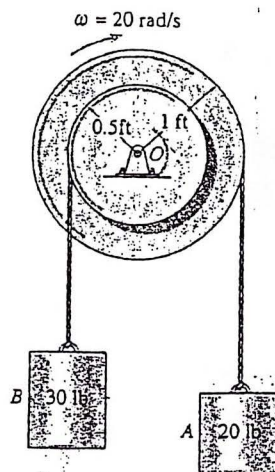


Q3 (13 point)

The forklift and operator have a combined weight of 10 000 lb and center of mass at G . If the forklift is used to lift the 2000-lb concrete pipe, determine the normal reactions on each of its four wheels if the pipe is given an upward acceleration of 4 ft/s^2 .

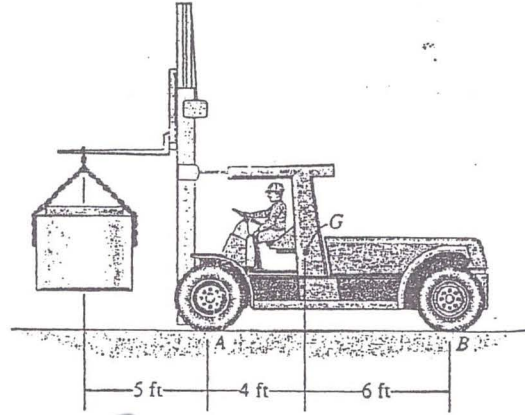

Q4(12 point)

The velocity of the slider block C is 4 ft/s up the inclined groove. Determine the angular velocity of links AB and BC and the velocity of point B at the instant shown.

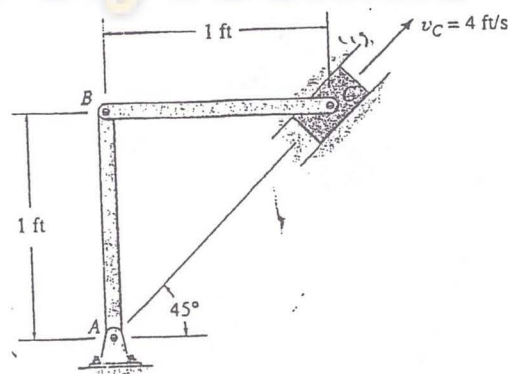

Good Luck


لجنة الميكانيك - الإتجاه الإسلامي

AL-Balqa Applied University
Faculty of Engineering Technology


Mechanical department
Final exam – Dynamics
2008-2009

Dr. Salameh Swalha
Dr : Mohamed Gaith


Q1 (12 point) The shaper mechanism is designed to give a slow cutting stroke and a quick return to a blade attached to the slider at C . Determine the velocity of the slider block C at the instant $\theta = 60^\circ$, if link AB is rotating at 4 rad/s .

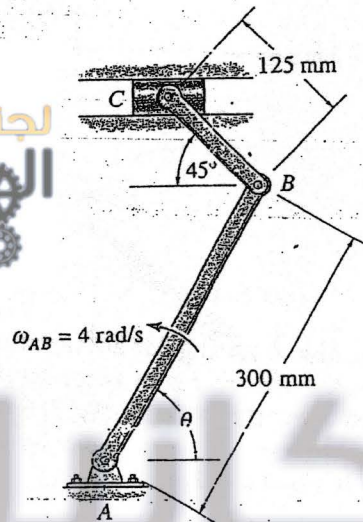


Q2(13 point) The block has a mass of 0.5 kg and moves within the smooth vertical slot. If the block starts from rest when the attached spring is in the unstretched position at A , determine the constant vertical force F which must be applied to the cord so that the block attains a speed $v_B = 2.5 \text{ m/s}$ when it reaches B ; $s_B = 0.15 \text{ m}$. Neglect the mass of the cord and pulley.

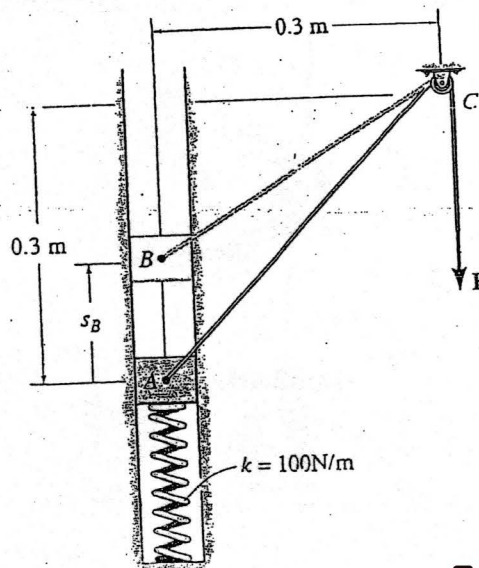

Q3 (13 point) The 4-kg slender rod is subjected to the force and couple moment. When the rod is in the position shown it has a angular velocity $\omega_1 = 6 \text{ rad/s}$. Determine its angular velocity at the instant it has rotated 360° . The force is always applied perpendicular to the axis of the rod and motion occurs in the vertical plane.

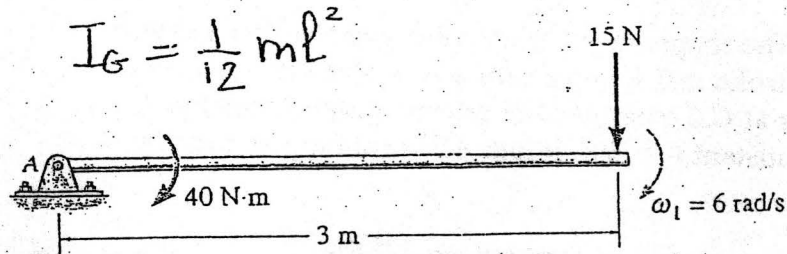

Q4(12 point) A motor gives disk A an angular acceleration of $\alpha_A = (0.6t^2 + 0.75) \text{ rad/s}^2$, where t is in seconds. If the initial angular velocity of the disk is $\omega_0 = 6 \text{ rad/s}$, determine the magnitudes of the velocity and acceleration of block B when $t = 2 \text{ s}$.

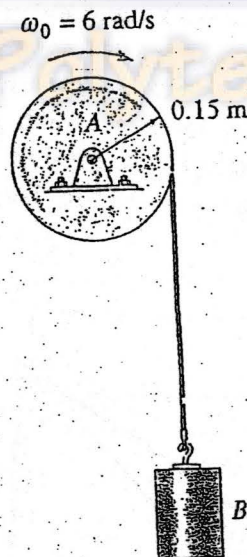

Good Luck

