

$$W_u = 1.4DL + 1.7LL$$

DL..

$$\text{Concrete slabs} = 24 \times 60 = 3.84 \text{ KN/m}^2$$

$$\text{Concrete tiles} = 20 \times 0.04 = 0.8 \text{ kn/m}^2$$

$$\text{Soil} = 18 \times 0.15 = 2.7 \text{ kn/m}^2$$

$$\text{Sand} = 16.5 \times 0.03 = 0.5 \text{ kn/m}^2$$

$$DL = 7.84 \text{ kn/m}^2$$

$$LL = 2 \text{ kn/m}^2$$

$$W_u = 1.4 \times 7.84 + 1.7 \times 2$$

$$= 10.976 + 3.4 = 14.38 \text{ kn/m}^2$$

$$\text{Thick of slab} = 160 \text{ mm}$$

Design slab(1)

Lb

$$\frac{L_b}{L_a} = 7/6 = 1.167 < 2$$

La

m	M <sup>DL</sup>	M <sup>LL</sup>	W
Ca=0.072	Ca=0.028	Ca=0.032	Wa=0.72
Cb=0.013	Cb=0.013	Cb=0.02	Wb=0.21

Design as two way slab

Short direction

$$M_a^- = c_a \cdot w_u \cdot L_a^2$$

$$= 0.072 \times 14.38 \times (6)^2$$

$$= 37 \text{ kn.m}$$


$$M_a^+ = (c_a \cdot DL \cdot w_u \cdot DL + c_a \cdot LL \cdot w_u \cdot LL) \cdot (L_a)^2$$

$$= (0.028 \times 10.976 + 0.032 \times 3.4) \cdot (6)^2$$

$$= 15 \text{ kn.m}$$

Moment in column strip =  $\frac{2}{3} \cdot M$  middle

$$M^- = 0.67 \times 37 = 25 \text{ KN.M}$$



$$M^+ = .67 * 15 = 10 \text{KN.M}$$

Long direction

$$M_b^- = 0.021 * 14.38 * (7)^2 = 14.8 \text{kn.m}$$

$$M_b^+ = (0.013 * 10.796 + 0.02 * 3.4) * (7)^2 = 10.32 \text{kn.m}$$

$$M^- \text{ at discontinuous end} = 1/3 * M^+$$

$$= .33 * 10.32 = 3.44 \text{Kn.m}$$

Moment in column strip =  $2/3 * M$  middle

$$= 0.67 * 14.8 = 9.86 \text{kn.m}$$

-9.86	-14.8	-9.86
+6.88	+10.32	+6.88
-2.3	-3.44	-2.3

Long direction

-25	+10	-25
-37	+15	-37
-25	+10	-25

short direction

Short direction

$$d_a = 160 - 20 - 12/2 = 134 \text{mm}$$

$$\text{Max moment} = 37 \text{kn.m}$$

$$P = 5.78 * 10^{-3} \quad f_c = 25 \text{mpa}$$

$$b = 1000 \text{mm} \quad d = 134 \text{mm}$$

$$\rho_{min} = \frac{1.4}{420} = .033$$

$$\rho_{max} = .75 * \rho_b = 0.02$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = 5.78 * 10^{-3} * 1000 * 134$$

$$A_s = 774.52 \text{mm}^2$$

$$S = \text{MIN} \left( \frac{113}{774.52} * 1000, 2 * 160, 500 \right)$$

$$= \text{MIN}(150, 320, 500)$$

$$S = 150 \text{mm}$$

$$\text{no of bars} = \frac{A_s}{A_B} = \frac{750.4}{113} = 7 \text{bar@each}(1\text{m})$$

Short direction  
max moment=14.8KN.M

$$\rho = 0.003$$

$$\rho_{min} < \rho < \rho_{max}$$

$$AS=3.3*10^{-3}*1000*122=403MM^2$$

Middle strip space

$$S = MIN \left( \frac{113}{403} * 1000, 2 * 160, 500 \right)$$

$$S=MIN(280,320,500)$$

$$S=280MM$$

$$\text{No of bars}=403/113=4\text{bars @each}(1m)$$

When  $f_c=50\text{mpa}$

$$\rho = 0.00267$$

$$\rho = \rho_{MIN} = 0.033$$

$$AS=3.3*10^{-3}*1000*122$$

$$=403\text{mm}^2$$

$$S=\min(113/403*1000, 2*160, 500)$$

$$=\min(280,320,500)$$

$$S=280\text{mm}$$

$$\text{No of bars}=403/113=4 \text{ bars@ each}(1m)$$

CHECK SHEAR

$$W=w_u*La*L_b$$

$$=14.38*6*7$$

$$W=604$$

$$W_a=W* w_a$$

$$=604*0.79=477$$

$$W_b=W*w_b$$

$$W_b = 604 * 0.21$$

$$W_b = 127$$

$$V_a = W_a / 2L_b = 477 / 14$$

$$V_a = 34 \text{ kn}$$

$$V_b = W_b / 2L_a = 127 / 12 = 11 \text{ kn}$$

$$V_a > V_b$$

هنا المعادلة اكتب  $(V_a - w_u * w_a * d_a) / \phi = \frac{34 - 14.38 * 0.79 * 0.134}{0.85}$   
 $= 38.2 \text{ kn}$

$$V_c = 0.17 * \sqrt{f_c} * b * d_{ave}$$

$$f_c = 25 \text{ mpa}$$

$$V_c = 108.8 \text{ kn more than } 38.2 \text{ kn} \dots \text{ok}$$

$$f_c' = 50 \text{ mpa}$$

$$V_c = 154 \text{ kn more than } 38.2 \text{ kn} \dots \text{ok}$$

DESIGN SLAB(2)

$$L_b / L_a = 7.25 / 6 = 1.3$$

Design two way slab

$$M = L_a / L_b = 6 / 7.25 = 0.75$$

Short direction

$$M_a^- = c_a * w_u * l_a^2$$

$$= 0.078 * 14.38 * (6)^2 = 40.38 \text{ kn.m}$$

$$M_a^+ = [c_a, DL * w_u, DL + c_a, LL * w_u, LL] * (l_a)^2$$


$$= 0.031 * 10.796 + 0.046 * 3.4 * (6)^2 = 17.88 \text{ kn.m}$$

Moment in column strip = 2/3 \* M middle

$$M^- = 2/3 * 40.38 = 26.92 \text{ kn.m}$$

$$M^+ = 2/3 * 17.88 = 11.92 \text{ kn.m}$$

	M <sup>-</sup>	M <sup>+</sup> DL	M <sup>+</sup> LL	W load
	Ca=0.073	Ca=0.031	Ca=0.046	Wa=0.86
	Cb=0.014	Cb=0.007	Cb=0.013	Wb=0.14

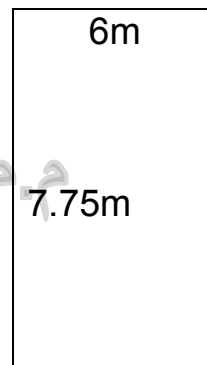

Long direction

$$M_b^- = c_b \cdot w_u \cdot L_b^2$$

$$= 0.014 \cdot 14.38 \cdot (7.75)^2 = 12 \text{ kn.m}$$

$$M_b^+ = [0.007 \cdot 10.976 + 0.013 \cdot 3.4] \cdot (7.75)^2 = 7.27 \text{ kn.m}$$

$$M^- \text{ at discontinuous end} = 1/3 \cdot M^+$$

$$= 1/3 \cdot 2.27 [2.42 \text{ kn.m}]$$

$$M \text{ in column strip} = 2/3 \cdot M \text{ middle}$$

$$= 0.67 \cdot 2.42 = 1.61 \text{ kn.m}$$

$$M^- = 0.67 \cdot 12 = 8 \text{ kn.m}$$

$$M^+ = 0.67 \cdot 7.27 = 4.85 \text{ kn.m}$$

short direction

$$d_a = 160 - 20 - 12/2 = 134 \text{ mm}$$

$$\text{max moment} = 40.38 \text{ kn.m}$$

$$\rho = 0.00635$$

$$\rho_{min} = .0033$$

$$\rho_{max} = 0.02$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.00635 \cdot 1000 \cdot 134$$

$$A_s = 851 \text{ mm}^2$$

$$S = \min[113/851 \cdot 1000, 2 \cdot 160, 500]$$

$$S = 130 \text{ mm}$$

$$\text{No of bars} = 851/113 = 8 \text{ bars@ each(1m)}$$

$$F_c' = 50 \text{ mpa}$$

$$\text{Max moment} = 40.38 \text{ kn.m}$$

-1.16	-2.42	-1.16
+4.85	+7.27	+4.85
-8	-12	-8

Long direction

-26.92	+11.92	-26.92
-40.38	+17.88	-40.38
-26.92	+11.92	-26.92

$$\rho = 0.00613$$

$$\rho_{min} = 0.0033$$

$$\rho_{max} = 0.04$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = \rho * b * d$$

$$A_s = 0.00613 * 1000 * 134$$

$$A_s = 821.42 \text{mm}^2$$

$$S = \min[113 * 821.42 / 1000, 2 * 160, 500]$$

$$S = 130 \text{mm}$$

$$\text{No of bars} = 821.42 / 113 = 8 \text{ bars@ each (1m)}$$

Long direction

$$d_b = 122 \text{mm}$$

$$\text{max moment} = 12 \text{kn.m}$$

$$f_c' = 25 \text{mpa}$$

$$\rho = 0.00218$$

$$\rho_{min} > \rho$$

$$\rho_{min} = \rho$$

$$A_s = \rho * b * d$$

$$A_s = 0.0033 * 1000 * 122$$

$$A_s = 403 \text{mm}^2$$

$$S = [113 / 403 * 1000, 2 * 160, 500]$$

$$S = 280 \text{mm}$$

$$\text{No of bars} = 403 / 113 = 4 \text{ bars@ each (1m)}$$

$$f_c' = 50 \text{mpa}$$

$$\rho = 0.0022$$

$$\rho_{min} = \rho$$

$$A_s = \rho * b * d$$

مشروع التخرج لنيل درجة البكالوريوس  
احداث

سبأ عمران  
مروة فائق

محمد عبد خلهن

سجى عدنان  
نور كمال

اشراف

م.م. علي عبد سلطان

$$A_s = 0.0033 * 1000 * 122$$

$$A_s = 403 \text{ mm}^2$$

$$S = [113 / 403 * 1000, 2 * 160, 500]$$

$$S = 280 \text{ mm}$$

$$\text{No of bars} = 403 / 113 = 4 \text{ bars @ each (1m)}$$

CHECK SHEAR

$$W = w_u * L_a * L_b$$

$$W = 14.38 * 6 * 7.75$$

$$W = 668$$

$$W_a = W * w_a = 668 * 0.86 = 574$$

$$W_b = W * w_b = 668 * 0.14 = 94$$

$$V_a = W_a / 2 L_b = 574 / 2 * 7.75 = 37$$

$$V_b = W_b / 2 L_a = 94 / 12 = 7.83$$


$$V_A > V_B$$

$$\frac{V_a - w_u * w_a * d_a}{\phi} = \frac{37 - 14.38 * 0.86 * 0.134}{0.85} = 42 \text{ kn}$$

$$V_c = 0.17 * \sqrt{f_c'} * b * d = 108.8 \text{ kn} > 42 \text{ kn} \dots \text{ok}$$

$$f_c' = 50 \text{ mpa}$$

$$v_c = 154 \text{ kn} > 42 \text{ kn}$$

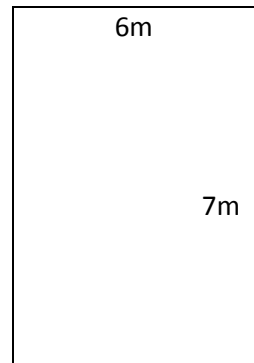

DESIGN SLAB(3)

$$L_b / L_a = 7 / 6 = 1.167$$

Design two way slab

$$M = L_a / L_b = 6 / 7 = 0.85$$

M <sup>-</sup>	M <sup>+DL</sup>	M <sup>+LL</sup>	W Load
Ca=0.065 Cb=0.034	Ca=0.036 Cb=0.019	Ca=0.043 Cb=0.023	Wa=0.66 Wb=0.34

Short direction

$$M_a^- = c_a * w_u * L_a^2 = 0.065 * 14.38 * (6)^2 = 33.65 \text{ kn.m}$$

$$M_a^+ = [0.036 * 10.976 + 0.043 * 3.4] * (6)^2 = 19.48 \text{ kn.m}$$

$$M^- \text{ at discontinuous end} = 1/3 * M^+ \\ = 1/3 * 19.48 = 6.5 \text{ kn.m}$$

Moment in column strip =  $2/3 * M$  middle

$$M^- = 2/3 * 6.5 = 4.33 \text{ kn.m}$$

$$M^- = 2/3 * 33.65 = 22.43 \text{ kn.m}$$

$$M^+ = 2/3 * 19.48 \text{ kn.m}$$

Long direction

$$M_b^- = 0.034 * 14.38 * (7)^2 = 24 \text{ kn.m}$$

$$M_b^+ = [0.019 * 10.976 + 0.023 * 3.4] * (7)^2 = 14 \text{ kn.m}$$

$$M^- \text{ at discontinuous end} = 1/3 * M^+ \\ = 1/3 * 14 = 4.67 \text{ kn.m}$$

Moment in column strip =  $2/3 * M$  middle

$$M^- = 2/3 * 4.67 = 3 \text{ kn.m}$$

$$M^- = 2/3 * 24 = 16 \text{ kn.m}$$

$$M^+ = 2/3 * 14 = 9.33 \text{ kn.m}$$

short direction

$$d_a = 134 \text{ mm}$$

$$\text{max moment} = 33.65 \text{ kn.m}$$

$$f_c = 25 \text{ mpa}$$

$$\rho = 0.00523$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = \rho * b * d$$

-16	-24	-16
+9.33	+14	+9.33
-3	-4.67	-3

-22.43	+9.65	-4.33
-33.65	+19.48	-6.5
-22.43	+9.65	-4.33



$$A_s = 0.00523 * 1000 * 134 = 700$$

$$S = \min[113/700 * 1000, 2 * 160, 500]$$

$$S = 160 \text{ mm}$$

$$\text{No of bars} = 700/113 = 7 \text{ bars @ each (1m)}$$

$$f_c' = 50 \text{ mpa}$$

$$mu = 33.65 \text{ kn.m}$$

$$\rho = 0.0051$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = \rho * b * d$$

$$A_s = 0.0051 * 1000 * 134$$

$$A_s = 683.4 \text{ mm}^2$$

$$S = [1000 * 113 / 683.4, 2 * 160, 500]$$

$$S = 160 \text{ mm}$$

$$\text{No of bars} = 683.4 / 113 = 7 \text{ bars @ each (1m)}$$

Long direction

$$d_b = 122 \text{ mm}$$

$$\text{max moment} = 24 \text{ kn.m}$$

$$\rho = 0.0045$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = \rho * b * d$$

$$A_s = 0.0045 * 1000 * 122$$

$$A_s = 549 \text{ mm}^2$$

$$S = [113 / 549 * 1000, 2 * 160, 500]$$

$$S = 200 \text{ mm}$$

$$\text{No of bars} = 549 / 113 = 5 \text{ bars @ each (1m)}$$

$$f_c' = 50 \text{ mpa}$$

$$mu = 24 \text{ kn.m}$$

$$\rho = 0.00436$$

$$\rho_{min} < \rho < \rho_{max}$$

$$A_s = \rho * b * d$$

$$A_s = 0.00436 * 1000 * 122$$

$$A_s = 532 \text{ mm}^2$$

$$S = [113 / 532 * 1000, 2 * 160 * 500]$$

$$S = 210 \text{ mm}$$

$$\text{No of bars} = 532 / 113 = 5 \text{ bars @ each (1m)}$$

CHECK SHEAR

$$W = w_u * L_a * L_b$$

$$W = 14.38 * 6 * 7 = 604$$

$$W_a = W * w_a$$

$$W_a = 604 * 0.66 = 398.84$$

$$W_b = W * w_b$$

$$W_b = 604 * 0.34 = 205.36$$

$$V_a = 398.84 / 2 * 7 = 28$$

$$V_b = 205.36 / 2 * 6 = 17$$

$$V_a > V_b$$

$$\frac{V_a - w_u * w_a * d}{\phi} = \frac{28 - 14.38 * 0.66 * 0.134}{0.85} = 31 \text{ kn}$$

$$V_c = 0.17 \sqrt{25} * 1000 * 128 = 108.8 > 31 \text{ kn}$$

$$f_c' = 50 \text{ mpa}$$

$$V_c = 154 \text{ kn} > 31 \text{ kn} \quad \dots \dots \text{ok}$$

## DESIGN SLAB(4)

$$L_b/L_a=5.15/4=1.28$$

Design two way slab

$$M=La/L_b=4/5.15=0.75$$

Short direction

$$M_a^- = 0.088 * 14.38 * (4)^2$$

$$M_a^- = 20.24 \text{ kn.m}$$

$$M_a^+ = [0.048 * 10.976 + 0.055 * 3.4] * (4)^2$$

$$M_a^+ = 11.42 \text{ kn.m}$$

Long direction

$$M_b^- = 0.024 * 14.38 * (5.15)^2$$

$$M_b^- = 9.15 \text{ kn.m}$$

$$M_b^+ = [0.012 * 10.976 + 0.016 * 3.4] * (5.15)^2$$

$$M_b^+ = 5 \text{ KN.M}$$

Short direction

$$d_a = 134 \text{ mm}$$

$$\text{Max moment} = 20.24 \text{ kn.m}$$

$$f_c = 25 \text{ MPa}$$

$$\rho = 0.0031$$


$$\rho = \rho_{min}$$

$$\rho = .0033$$

$$A_s = \rho * b * d$$

$$A_s = .0033 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

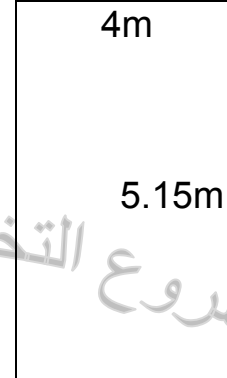

مشروع التخرج لنيل درجة البكالوريوس  
اعداد  
سبأ عمران  
مروة فائق

محمد عبد خلهن

سجى عدنان  
نسور كمال

اشراف

م.م. علي عبد سلطان

M <sup>-</sup>	M <sup>+</sup> DL	M <sup>+</sup> LL	W load
Ca=0.088 Cb=0.024	Ca=0.048 Cb=0.012	Ca=0.055 Cb=0.016	Wa=0.88 Wb=0.12

$$S = [113/442.2 * 1000, 2 * 160, 500]$$

$$S = 250 \text{mm}$$

$$\text{No of bars} = 442.2/113 = 4 \text{ bars@ each}(1\text{m})$$

$$FC' = 50 \text{mpa}$$

$$\rho = 0.0031$$

$$\rho_{min} > \rho$$

$$AS = \rho * b * d$$

$$AS = 0.0033 * 1000 * 134$$

$$AS = 442.2 \text{mm}^2$$

$$S = [113/442.2 * 1000, 2 * 160, 500]$$

$$S = 250 \text{mm}$$

$$\text{No of bars} = 442.2/113 = 4 \text{ bars@ each}(1\text{m})$$

Long direction

$$db = 122 \text{mm}$$

$$\text{max moment} = 5 \text{kn.m}$$

$$FC' = 25 \text{mpa}$$

$$\rho = 0.00896$$

$$\rho_{min} > \rho$$

$$AS = \rho * b * d$$

$$AS = 0.0033 * 1000 * 122$$

$$AS = 403 \text{mm}^2$$

$$S = [113/403 * 1000, 2/160, 500]$$

$$S = 280 \text{mm}$$

$$\text{No of bars} = 403/113 = 4 \text{ bars@each}(1\text{m})$$

CHECK SHEAR

$$W = w_u \cdot L_a \cdot L_b$$

$$W = 14.38 \cdot 4 \cdot 5.15$$

$$W = 296$$

$$W_a = W \cdot w_a = 296 \cdot 0.88 = 260$$

$$W_b = W \cdot w_b = 296 \cdot 0.12 = 36$$

$$V_a = W_a / 2L_b = 260 / 2 \cdot 5.15 = 25 \text{ kn}$$

$$V_b = W_b / 2L_a = 36 / 2 \cdot 4 = 4.5 \text{ kn}$$

$$V_a > V_b$$

$$\frac{V_a - w_u \cdot w_a \cdot d}{\phi} = \frac{25 - 14.38 \cdot 0.88 \cdot 0.134}{0.85} = 27.42 \text{ kn}$$

$$V_c = 0.17 \cdot \sqrt{f_c'} \cdot b \cdot d$$

$$f_c' = 25 \text{ mpa}$$

$$V_c = 108.8 \text{ kn} > 27.42 \text{ kn} \dots \dots \dots \text{ ok}$$

$$f_c' = 50 \text{ mpa}$$

$$V_c = 154 \text{ kn} > 27.42 \text{ kn} \dots \dots \dots \text{ ok}$$

### DESIGN SLAB(5)

$$L_b / L_a = 4 / 3.25 = 1.2$$

Design two way slab

$$M = 3.25 / 4 = 0.8$$


Short direction

$$M_a^- = 0.065 \cdot 14.38 \cdot (3.25)^2$$

$$M_a^- = 9.87 \text{ kn.m}$$

$$M_a^+ = [0.026 \cdot 10.976 + 0.041 \cdot 3.4] \cdot (3.25)^2$$

$$M_a^+ = 4.5 \text{ kn.m}$$

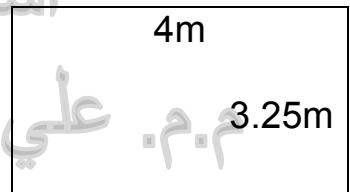

M <sup>-</sup>	M <sup>+</sup> DL	M <sup>+</sup> LL	W load
Ca=0.026 Cb=0.011	Ca=0.026 Cb=0.014	Ca=0.041 Cb=0.017	Wa=0.71 Wb=0.29

Long direction

$$M_b^- = 0.026 * 14.38 * (4)^2$$

$$M_b^+ = [0.011 * 10.976 + 0.017 * 3.4] * (4)^2$$

$$M_b^+ = 2.9 \text{ kn.m}$$

-6.58	-9.87	-6.58
+0.75	+4.5	+0.75
-6.58	-9.87	-6.58

Short direction

SHORT DIRECTION

$$d_a = 134 \text{ mm}$$

$$\text{max moment} = 9.87 \text{ kn.m}$$

$$f_c = 25 \text{ mpa}$$

$$\rho = 0.00147$$

$$\rho_{min} > \rho$$

$$A_s = \rho_{min} * b * d$$

$$A_s = 0.0033 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

$$S = [113 / 442.2 * 1000, 2 * 160, 500]$$

$$S = 250 \text{ mm}$$

$$\text{No of bars} = 442.2 / 113 = 4 \text{ bars @ each (1m)}$$

$$f_c = 50 \text{ mpa}$$

$$mu = 9.87 \text{ kn.m}$$

$$\rho = 0.00146$$

$$\rho_{min} > \rho$$

$$A_s = \rho * b * d$$

$$A_s = 0.0033 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

$$S = \min[113 / 442.2 * 1000, 2 * 160, 500]$$

-4.13	+1.93	-4.13
-6.2	+2.9	-6.2
-4.13	+1.93	-4.13

Long direction

$$S=250\text{mm}$$

$$\text{No of bars}=442.2/113=4 \text{ bars@ each}(1\text{m})$$

LONG DIRECTION

$$d_b=122\text{mm}$$

$$\text{max moment}=6.2\text{kn.m}$$

$$f_c = 25\text{mpa}$$

$$\rho = 0.0011$$

$$\rho_{min} > \rho$$

$$AS = \rho * b * d$$

$$AS=0.0033*1000*122$$

$$AS=403\text{mm}^2$$

$$S=\min[1000*113/403, 2*160, 500]$$

$$S=280\text{mm}$$

$$\text{No of bars}=403/113=4 \text{ bars @ each}(1\text{m})$$

$$f_c = 50\text{mpa}$$

$$\mu = 6.2\text{kn.m}$$

$$\rho = 0.0011$$

$$\rho_{min} > \rho$$

$$As = \rho * b * d$$

$$AS=0.0033*1000*122$$

$$AS=403\text{mm}^2$$

$$S=\min[1000*113/403, 2*160, 500]$$

$$S=280\text{mm}$$

$$\text{No of bars}=403/113=4 \text{ bars @ each}(1\text{m})$$

CHECK SHEAR

$$W = w_u * L_a * L_b$$

$$W = 14.38 * 3.25 * 4$$

$$W = 187$$

$$W_a = W * w_a$$

$$W_a = 187 * 0.71 = 133$$

$$W_b = W * w_b$$

$$W_b = 187 * 0.29 = 54$$

$$V_a = W_a / 2L_b$$

$$V_a = 133 / 2 * 4 = 17$$

$$V_b = W_b / 2L_a$$

$$V_b = 54 / 2 * 3.25 = 8.3$$

$$V_a > V_b$$

$$\frac{V_a - w_u * w_a * d}{\phi} = \frac{17 - 14.38 * 0.71 * 0.134}{0.85} = 18.4kn$$

هنا المعادلة اكتب  $c = 0.17 * \sqrt{f_c} * b * d$

$$f_c = 25mpa$$

$$V_c = 108.8kn > 18.4kn \dots \dots ok$$

$$f_c = 50mpa$$

$$V_c = 154kn > 18.4kn \dots \dots ok$$



## DESIGN SLAB(6)

$$L_b/L_a = 5.15/1.75 = 2.9 > 2$$

Design one way slab

$$d = t - \text{cover} - 12/2$$

$$d = 160 - 20 - 6 = 134 \text{ mm}$$

thickness of slab = 160 mm

$$m_u = w_u * \frac{l_n^2}{10} = 14.38 * \frac{(1.75)^2}{10} = 4.4 \text{ kn.m}$$

$$m_u = w_u * \frac{l_n^2}{11} = 14.38 * \frac{(1.75)^2}{11} = 4 \text{ kn.m}$$

$$m_u = w_u * \frac{l_n^2}{16} = 14.38 * \frac{(1.75)^2}{16} = 2.75 \text{ kn}$$

$$\text{max momen} = 4.4 \text{ kn.m}$$

$$f_c' = 25 \text{ mpa}$$

$$\rho = .00065$$

$$\rho_{min} > \rho$$

$$A_s = \rho_{min} * b * d$$

$$A_s = 0.0033 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

$$S = \min[1000 * 113 / 442.2, 2 * 160, 500]$$

$$S = 250 \text{ mm}$$

Spacing for shrinkage and temperature

$$S = \min[1000 * 113 / 288.5, 2 * 160, 500]$$

$$S = 460 \text{ mm}$$

No of bars =  $442.2 / 113 = 4$  bars @ each (1m)

$$f_c' = 50 \text{ mpa}$$

$$\rho = 0.00065$$

$$\rho_{min} > \rho$$

$$A_s = \rho * b * d$$

1.75m

5.15m

مشروع التخرج لثمن - رجب البكالوريوس  
اعداد  
سبأ عمران  
محمد عبد خلهن  
سجى عدنان  
نور كمال

اكتب المعادلة هنا

اشراف

م.م. علي عبد سلطان

$$A_s = 0.0033 \cdot 1000 \cdot 134$$

$$A_s = 442.2 \text{ mm}^2$$

$$S_{\text{main}} = 250 \text{ mm}$$

$$S_{\text{shrinkage}} = 460 \text{ mm}$$

No of bars = 4 bars @ each (1m)

DESIGN SLAB (7)

$$L_b/L_a = 6/3.25 = 1.8$$

Design two way slab

$$M = 3.25/6 = 0.55$$

Short direction

$$M_a^- = 0.084 \cdot 14.38 \cdot (3.25)^2$$

$$M_a^- = 12.75 \text{ kn.m}$$

$$M_a^+ = [0.035 \cdot 10.976 + 0.062 \cdot 3.4] \cdot (3.25)^2$$

$$M_a^+ = 6.3 \text{ kn.m}$$


Long direction

$$M_b^- = 0.007 \cdot 14.38 \cdot (6)^2$$

$$M_b^- = 3.6 \text{ kn.m}$$

$$M_b^+ = [0.003 \cdot 10.976 + 0.006 \cdot 3.4] \cdot (6)^2$$

$$M_b^+ = 1.92 \text{ kn.m}$$

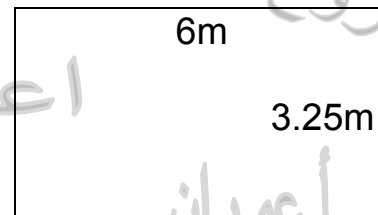

M <sup>-</sup>	M <sup>+</sup> DL	M <sup>+</sup> LL	W load
Ca=0.084 Cb=0.007	Ca=0.035 Cb=0.003	Ca=0.062 Cb=0.006	Wa=0.92 Wb=0.08

## SHORT DIRECTION

$$d_a = 134 \text{ mm}$$

$$\text{max moment} = 12.76 \text{ kn.m}$$

$$f_c' = 25 \text{ mpa}$$

$$\rho = 0.00192$$

$$\rho_{min} > \rho$$

$$A_s = \rho * b * d$$

$$A_s = 0.003 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

$$S = \min[1000 * 113 / 442.2, 2 * 160, 500]$$

$$S = 250 \text{ mm}$$

$$\text{No of bars} = 442.2 / 113 = 4 \text{ bars @ each (1m)}$$

$$f_c' = 50 \text{ mpa}$$

$$\mu = 12.76 \text{ kn.m}$$

$$\rho = 0.00189$$

$$\rho_{min} > \rho$$

$$A_s = \rho * b * d$$

$$A_s = 0.0033 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

$$S = \min[1000 * 113 / 442.2, 2 * 160, 500]$$

$$S = 250 \text{ mm}$$

$$\text{No of bars} = 442.2 / 113 = 4 \text{ bars @ each (1m)}$$

## LONG DIRECTION

$$d_b = 122 \text{ mm}$$

$$\text{max moment} = 3.6 \text{ kn.m}$$

-2.4	+1.28	-2.4
-3.6	+1.92	-3.6
-2.4	+1.28	-2.4

Long direction

-8.5	-12.76	-8.5
+4.2	+6.3	+4.2
-8.5	-12.76	-8.5

Short direction

$$f_c' = 25 \text{ mpa}$$

$$\rho = 0.000644$$

$$\rho_{min} > \rho$$

$$AS = \rho * b * d$$

$$AS = 0.003 * 1000 * 122$$

$$AS = 403 \text{ mm}^2$$

$$S = \min[1000 * 113 / 403, 2 * 160, 500]$$

$$S = 280 \text{ mm}$$

$$\text{No of bars} = 403 / 113 = 4 \text{ bars @ each (1m)}$$

$$f_c' = 50 \text{ mpa}$$

$$\mu = 3.6 \text{ kn.m}$$

$$\rho = 0.00064$$

$$\rho_{min} > \rho$$

$$AS = \rho_{min} * b * d$$

$$AS = 0.003 * 1000 * 122$$

$$AS = 403 \text{ mm}^2$$

$$S = \min[1000 * 113 / 403, 2 * 160, 500]$$

$$S = 280 \text{ mm}$$

$$\text{No of bars} = 403 / 113 = 4 \text{ bars @ each (1m)}$$

CHECK SHEAR

$$W = w_u * L_a * L_b$$

$$W = 14.38 * 6 * 3.25$$

$$W = 280 \text{ mm}$$

$$W_a = W * w_a$$

$$W_a = 280 * 0.91 = 255$$

$$W_b = W * w_b$$

$$W_b = 280 * 0.08 = 22$$

$$V_a = W_a / 2L_b = 255 / 2 * 6 = 21.3$$

$$V_b = W_b / 2L_a = 22 / 2 * 3.25 = 3.4$$

$$V_a > V_b$$

$$\frac{V_a - w_u * w_a * d}{\phi} = \frac{21.3 - 14.38 * 0.92 * 0.134}{0.085} = 23 \text{kn}$$

$$V_c = 0.17 * \sqrt{f_c'} * b * d$$

$$f_c' = 25 \text{mpa}$$

$$V_c = 108.8 \text{kn} > 23 \text{kn} \dots\dots, \text{ok}$$

$$f_c' = 50 \text{mpa}$$

$$V_c = 154 \text{kn} > 23 \text{kn} \dots\dots \text{ok}$$

مشروع التخرج لنيل درجة البكالوريوس  
اعداد  
سبأ عمران  
مروة فائق  
محمد عبد خلهن  
سجى عدنان  
نور كمال

اشراف

م.م. علي عبد سلطان

Slab no	direct	Mu Kn.m	$\rho$	$\rho$	AS	AS	S	S
			Fc`=25	Fc`=50	Fc`=25	Fc`=50	Fc`=25	Fc`=50
S1	Short	38.88	0.0061	0.006	817	804	130	140
	Long	15.4	0.0033	0.003	403	403	280	280
S2	Short	42.12	0.0066	0.0064	884.4	858	120	130
	Long	8.76	0.0016	0.0016	403	403	280	280
S3	Short	10.29	0.0015	0.0015	442.2	442.2	250	250
	Long	6.48	0.0012	0.0012	403	403	280	280
S4	Short	35.64	0.0056	0.0054	750.4	724	150	150
	Long	16.66	0.0031	0.0033	403	403	280	280
S5	Short	21.12	0.0032	0.0032	442.2	442.2	250	250
	Long	5.5	0.0098	0.0098	403	403	280	280
S6	Short	4.6	0.0068	0.007	442.2	442.2	250	250
	Long							
S7	Short	13.3	0.002	0.00197	442.2	442.2	250	250
	Long	3.78	0.0064	0.00674	403	403	280	280

For ground plan

اشراف

م.م. علي عبد سلطان

Slab no	direct	Mu Kn.m	$\rho$	$\rho$	AS Mm <sup>2</sup>	AS Mm <sup>2</sup>	S mm	S mm
			Fc`=25	Fc`=25	Fc`=25	Fc`=50	Fc`=25	Fc`=50
S1	Short Long	37 14.8	0.0057 0.0033	0.0056 0.0026	774.5 403	750.4 403	140 250	150 280
S2	Short Long	46.38 12	0.0063 0.0021	0.0061 0.0022	851 403	821.42 403	130 260	130 280
S3	Short Long	9.87 6.2	0.0015	0.0015	442.2	442.2	250	250
S4	Short Long	33.65 24	0.0052 0.0045	0.0051 0.0045	683.4 532	683.4 532	160 200	160 280
S5	Short Long	20.24 5	0.0031 0.0089	0.0031 0.0011	442.2 403	442.2 403	250 280	250 280
S6	Short Long	4.4	0.0065	0.0065	442.2	442.2	250	250
S7	Short Long	12.76 3.6	0.0019 0.0064	0.0019 0.0064	442.2 403	442.2 403	250 280	250 280

For first plane

م.م. علي عبد سلطان

## DESIGN OF COLUMN

$$W_u = 14.38 \text{ kn.m}$$

$$\text{Weight of stem} = (0.35 - 0.16) * 0.25 * 25 * 1.4 = 1.67 \text{ kn/m}$$

$$\text{Partition} = 1.5 * 0.25 * 20 * 1.4 = 10.5 \text{ kn/m}$$

$$\text{Dimension of column} = 400 \text{ mm} * 400 \text{ mm}$$

$$\text{Weight of column} = 0.4 * 0.4 * 3.5 * 25 * 1.4 = 19.6 \text{ kn/m}$$

$$d' = 40 + 10 + 25/2 = 62.5 \text{ mm}$$

### DESIGN COL(1)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 14.38(2.27 * 2.85) + (1.67 * 2.85) + (1.67 * 2.27) + 19.6 + 10.5$$

$$P_u = 131.6 \text{ kn}$$

Moment from both side.....biaxial

$$w_u(x) = \frac{14.38 * 4.25}{3} + 1.67 + 10.5$$

$$W_u(x) = 32.54 \text{ kn/m}$$

$$w_u(y) = \frac{14.38 * 4.25}{3} * \frac{(3 - 0.78)}{2} + 1.67 + 10.5$$

$$W_u(y) = 36.4 \text{ kn/m}$$

$$m_u x = \frac{36.4(5.4 - 0.4)}{16} = 59.17 \text{ kn.m}$$

$$m_u y = \frac{32.54(4.25 - 0.4)}{13} = 31.73 \text{ kn.m}$$

$$\frac{m_u y}{m_u x} = \frac{31.73}{59.14} = 0.54 < \frac{b}{h} = 1$$

$$M_u \text{ eq} = 59.17 + 31.73(0.4/0.4) * (1 - 0.65)/0.65$$

$$M_u \text{ eq} = 76.25 \text{ kn.m}$$



$$\gamma = \frac{400 - 2 * 62.5}{400} = 0.7$$

$$kn = \frac{131.6}{0.7 * 25 * 0.4 * 0.4 * 1000} = 0.05$$

$$Rn = \frac{76.25}{0.7 * 25 * 0.4 * 0.4 * 0.4 * 1000} = 0.068$$

From chart..... $\rho_g = \rho_{min} = 0.01$

$$AS = \rho_g * b * h$$

$$AS = 0.01 * 400 * 400$$

$$AS = 1600 \text{mm}^2$$

$$Ab = 490 \text{mm}^2$$

$$\text{no of bars} = \frac{1600}{490} = 3.2$$

use 4  $\theta$  25

$$F_c = 50 \text{mpa}$$

Dimension of column = 300mm \* 300mm

Weight of column = 11.025kn/m

Weight of stem = 1.67kn/m

Partition = 10.5kn/m

$$P_u = 123.11 \text{kn}$$

$$M_u = 76.25 \text{kn.m}$$

$$Rn = \frac{76.25}{0.7 * 50 * 0.3 * 0.3 * 0.3 * 1000} = 0.08$$

$$kn = \frac{123.1}{0.7 * 50 * 0.3 * 0.3 * 1000} = 0.04$$

$$\rho_g = 0.011$$

$$A_s = 0.011 * 300 * 300 = 990 \text{mm}^2$$

$$\text{No of bars} = 990 / 490 = 2.02$$

use 3  $\theta$  25

DESIGN COL(2)

$$F_c' = 25 \text{mpa}$$

$$P_u = 14.38(3.125 * 2.85) + 1.67 * 2.85 + 1.67 * 3.125 + 19.6 + 10.5$$

$$P_u = 168.6 \text{kn}$$

$$w_{u y} = \frac{14.38 * 4.25}{3} + 1.67 + 10.5 = 32.54 \frac{\text{kn}}{\text{m}}$$

$$w_{u x} = \frac{14.38 * 5.4}{3} * \frac{3 - 0.78}{2} + 1.67 + \frac{14.38 * 2}{2} = 47 \frac{\text{kn}}{\text{m}}$$

$$m_{u x} = \frac{47(5.1)}{10} = 123.3 \text{kn.m}$$

$$m_{u y} = \frac{32.54(4.25 - 0.4)}{10} = 50.8 \text{kn.m}$$

$$m_{u eq} = 123.3 + 50.8 \left( \frac{0.4}{0.4} \right) * \frac{1 - 0.65}{0.65} = 149.65 \text{kn.m}$$

$$\gamma = 0.7$$

$$k_n = \frac{168.6}{0.7 * 25 * 0.4 * 0.4 * 1000} = 0.06$$

$$R_n = \frac{149.65}{0.7 * 25 * 0.4 * 0.4 * 0.4 * 1000} = 0.134$$

$$\rho_g = 0.018 \dots \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.018 * 400 * 400 = 2880 \text{mm}^2$$

$$\text{No of bars} = 2880 / 490 = 5.8$$

use 6  $\theta$  25

$$F_c' = 50 \text{mpa}$$

$$P_u = 160.6 \text{kn}$$

$$M_u = 149.65 \text{ kn.m}$$

$$K_n = 0.05$$

$$R_n = 0.16$$

$$\gamma = 0.6$$

$$\rho_g = 0.028 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.028 * 300 * 300 = 2520 \text{ mm}^2$$

$$\text{No of bars} = 2520 / 490 = 5.14$$

use 6  $\theta$  25

DESIGN COL(3)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 14.38(4.125 * 3.78) + 1.67 * 3.78 + 1.67 * 4.125 + 19.6$$

$$P_u = 257 \text{ kn}$$

$$w_u x = \frac{14.38 * 6.25}{3} * \frac{(3 - 0.86)}{2} + 1.67 = \frac{49.85 \text{ kn}}{m}$$

$$w_u y = (14.38 * \frac{6.250}{3} + 1.67) = \frac{31.63 \text{ kn}}{m}$$

$$m_u x = \frac{49.85(7.5 - 0.4)}{10} = 258.4 \text{ kn.m}$$

$$m_u y = \frac{31.63(6.25 - 0.4)}{10} = 111.97 \text{ kn.m}$$

$$\frac{m_u y}{m_u x} = \frac{111.97}{258.4} = 0.45 < \frac{b}{h}$$

$$m_u eq = 258.4 + \frac{111.97 \left(\frac{0.4}{0.4}\right) (1 - 0.65)}{0.65} = 318.7 \text{ kn.m}$$

$$k_n = \frac{257}{0.7 * 25 * 0.4 * 0.4 * 1000} = 0.1$$

$$R_n = \frac{318.7}{0.7 * 25 * 0.4 * 0.4 * 0.4 * 1000} = 0.28$$

$$\rho_g = 0.044 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$AS=0.044*400*400=7040\text{mm}^2$$

$$\text{No of bars}=7040/490=13.36$$

use 14  $\theta$  25

$$F_c' = 50\text{mpa}$$

$$P_u = 248.43\text{kn}$$

$$M_u \text{ eq} = 318.7\text{kn.m}$$

$$\gamma = 0.6$$

$$k_n = \frac{248.43}{0.7 * 50 * .03 * .03 * 1000} = 0.08$$

$$R_n = \frac{318.7}{0.7 * 50 * 0.3 * 0.3 * 0.3 * 1000} = 0.33$$

From chart

$$\rho_g = 0.062 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$AS=0.062*300*300=5580\text{mm}^2$$

$$\text{No of bars}=5580/490=11.38$$

use 12  $\theta$  25

DESIGN COL (4)

$$F_c' = 25\text{mpa}$$

$$P_u = 14.38(3.8*3.3) + 1.67*3.3 + 1.67*3.8 + 19.6$$

$$P_u = 211.8\text{kn}$$

$$w_u x = \frac{14.38 * 6.25}{3} * \frac{3 - 0.86}{2} + 1.67 = 33.8 \text{ kn/m}$$

$$w_u y = \frac{14.38 * 6.25}{3} + 1.67 = 31.63 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{33.8 * 6.85}{16} = 163.3\text{kn.m}$$

$$31.63 * 5.85$$

$$\frac{\mu_y}{\mu_x} = \frac{111.9}{163.3} = 0.68 < \frac{b}{h}$$

$$\mu_{eq} = 163.3 + 111.9 \left( \frac{0.4}{0.4} \right) * \frac{1 - 0.65}{0.65}$$
$$= 223.56 \text{ kn.m}$$

$$\gamma = 0.7$$

$$k_n = \frac{211.8}{0.7 * 25 * 0.4 * 0.4 * 1000} = 0.08$$

$$R_n = \frac{223.56}{0.7 * 25 * 0.4 * 0.4 * 0.4 * 1000} = 0.2$$

$$\rho_g = 0.032 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.032 * 400 * 400 = 5120 \text{ mm}^2$$

$$\text{no of bars} = \frac{5120}{490} = 10.4$$

use 11  $\theta$  25

$$f_c = 50 \text{ mpa}$$

$$P_u = 203.2 \text{ kn}$$

$$M_u = 223.56 \text{ kn.m}$$

$$\gamma = 0.6$$

$$k_n = \frac{203.2}{0.7 * 50 * 0.3 * 0.3 * 1000} = 0.06$$

$$R_n = \frac{223.56}{0.7 * 50 * 0.3 * 0.3 * 0.3 * 1000} = 0.24$$

$$\rho_g = 0.045 \dots \dots \rho_{min} < \rho_{max}$$

$$A_s = 0.045 * 300 * 300 = 4050 \text{ mm}^2$$

$$\text{no of bars} = \frac{4050}{490} = 8.26$$

use 9  $\theta$  25

DESIGN COL(5)

$F_c = 25 \text{ mpa}$

$P_u = 14.38(5.5 \times 6.25) + 1.67 \times 5.5 + 1.67 \times 6.25 + 19.6$

$P_u = 533.5 \text{ kn}$

$$w_{u x} = 2 \left[ \frac{14.38 \times 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 = \frac{69.27 \text{ kn}}{m}$$

$$w_{u x} = 2 \left[ \frac{14.38 \times 3.5}{3} \right] + 1.67 = \frac{35.22 \text{ kn}}{m}$$

$$m_u x = \frac{69.27 \times 6.85}{10} - \frac{35.22 \times 3.1}{10} = 298.53 \text{ kn.m}$$

$m_u y = 0$

$\gamma = 0.7$

$$k_n = \frac{533.5}{0.7 \times 25 \times 0.4 \times 0.4 \times 1000} = 0.19$$

$$R_n = \frac{298.53}{0.7 \times 25 \times 0.4 \times 0.4 \times 0.4 \times 1000} = 0.26$$

$\rho_g = 0.037 \dots \dots \rho_{min} < \rho < \rho_{max}$

$AS = 0.037 \times 400 \times 400 = 5920 \text{ mm}$

$$\text{no of bars} = \frac{5920}{490} = 11.9 \quad \text{use } 12 \theta 25$$

$F_c = 50 \text{ mpa}$

$P_u = 525 \text{ kn}$

$M_u = 298.53 \text{ kn.m}$

$$k_n = \frac{525}{0.7 \times 50 \times 0.3 \times 0.3 \times 1000} = 0.16$$

$$R_n = \frac{298.53}{0.7 \times 50 \times 0.3 \times 0.3 \times 0.3 \times 1000} = 0.3$$

$$\rho g = 0.054$$

$$AS = 0.054 * 300 * 300 = 4860mm$$

$$no\ of\ bars = \frac{4860}{490} = 9.9$$

use 10  $\theta$  25

DESIGN COL (6)

$$P_u = 14.38(6.25 * 3.8) + 1.67 * 6.25 + 1.67 * 3.8 + 19.6 + 10.5$$

$$P_u = 107.78kn$$

$$w_u x = 2 \left[ \frac{14.38 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 10.5 = \frac{79.78kn}{m}$$

$$w_u y = \frac{14.38 * 6.25}{3} + 1.67 + 10.5 = \frac{42.13kn}{m}$$

$$m_u x = \frac{79.78 * 6.85}{16} = 333.96kn.m$$

$$m_u y = \frac{42.13 * 5.85}{10} = 144.2kn.m$$

$$\frac{m_u y}{m_u x} = \frac{144.2}{323.96} = 0.005 < \frac{b}{h}$$

$$m_u eq = 323.96 + 144.2 \left( \frac{0.4}{0.4} \right) * \frac{1 - 0.65}{0.65} = 401.6kn.m$$

$$\gamma = 0.7$$

$$k_n = \frac{107.78}{0.7 * 25 * 0.4 * 0.4 * 1000} = 0.04$$

$$R_n = \frac{401.6}{0.7 * 25 * .4 * .4 * .4 * 1000} = 0.35$$

$$\rho g = 0.062 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$AS = 0.062 * 400 * 400 = 9920mm$$

$$\text{no of bars} = \frac{9920}{490} = 19.2$$

use 20  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 99.2 \text{ kn}$$

$$M_u \text{ eq} = 401.6 \text{ kn.m}$$

$$\gamma = 0.6$$

$$k_n = \frac{99.2}{0.7 * 50 * 0.3 * 0.3 * 1000} = 0.03$$

$$R_n = \frac{401.6}{0.7 * 50 * 0.3 * 0.3 * 0.3 * 1000} = 0.42$$

$$\rho = \rho_{max} = 0.08$$

$$A_s = 0.08 * 300 * 300 = 7200 \text{ mm}^2$$

$$\text{no of bars} = \frac{7200}{490} = 14.69$$

use 15  $\theta$  25

DESIGN COL(7)

$$P_u = 14.38(5.375 * 6.25) + 1.67 * 5.375 + 1.67 * 6.25 + 19.6 \text{ م.م.}$$

$$P_u = 522 \text{ kn}$$

$$w_u x = 2 \left[ \frac{14.38 * 3.5}{3} \right] + 1.67 = 35.22 \text{ kn/m}$$

$$w_u x = \left[ \frac{14.38 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 = 35.52 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{35.5 * 6.85}{10} - \frac{35.22 * 3.1}{10} = 135.4 \text{ kn.m}$$

$$w_u y = \frac{14.38 * 6.25}{3} = 29.95 \text{ kn/m}$$



$$mu y = \frac{29.95 * 5.85}{10} = 106kn.m$$

$$\frac{mu y}{mu x} = \frac{106}{135.4} = 0.78 < \frac{b}{h}$$

$$mu eq = 135.4 + \frac{106 \left(\frac{0.4}{0.4}\right) (1 - 0.65)}{0.65} = 192.47kn.m$$

$$\gamma = 0.7$$

$$kn = \frac{522}{0.7 * 25 * 0.4 * 0.4 * 1000} = 0.19$$

$$Rn = \frac{192.47}{0.7 * 25 * 0.4 * 0.4 * 0.4 * 1000} = 0.18$$

$$\rho g = 0.021 \dots \dots \rho min < \rho < \rho max$$

$$As = 0.021 * 400 * 400 = 3360mm^2$$

$$no\ of\ bars = \frac{3360}{490} = 6.8$$

use 7  $\theta$  25

$$Fc' = 50mpa$$

$$Pu = 513.4kn$$

$$Mu eq = 206.8kn.m$$

$$\gamma = 0.6$$

$$kn = 0.16$$

$$Rn = 0.2$$

$$\rho g = 0.031 \dots \dots \rho min < \rho < \rho max$$

$$AS = 0.031 * 300 * 300 = 2790mm^2$$

$$No\ of\ bars = 2790/490 = 5.6$$

use 6  $\theta$  25

DESIGN COL(8)

$F_c = 25 \text{ mpa}$

$$P_u = 14.38(3.325 \times 3.825) + 1.67 \times 3.325 + 1.67 \times 3.825 + 19.6 + 10.5$$

$$P_u = 225 \text{ kn}$$

$$w_{u x} = \frac{14.38 \times 6.25}{3} \times \frac{3 - .86}{2} + 1.67 + 10.5 = 46.03 \frac{\text{kn}}{\text{m}}$$

$$w_{u y} = \frac{14.38 \times 6.25}{3} + 1.67 + 10.5 = 42.13 \frac{\text{kn}}{\text{m}}$$

$$m_{u x} = \frac{46.03 \times 6.85}{16} = 134.9 \text{ kn.m}$$

$$m_{u y} = \frac{42.13 \times 5.85}{16} = 90.12 \text{ kn.m}$$

$$\frac{m_{u y}}{m_{u x}} = \frac{90.12}{134.9} = 0.67 < \frac{b}{h}$$

$$m_{u eq} = 134.9 + \frac{90.12 \left( \frac{0.4}{0.4} \right) (1 - 0.65)}{0.65} = 183.43 \text{ kn.m}$$

$$\gamma = 0.7$$

$$k_n = 0.08$$

$$R_n = 0.164$$

$$\rho_g = 0.025 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.025 \times 400 \times 400 = 4000 \text{ mm}^2$$

$$\text{no of bars} = \frac{4000}{490} = 8.16$$

use 9  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 216.4 \text{ kn}$$

$$M_u \text{ eq} = 188.36 \text{ kn.m}$$

$$K_n = 0.07$$

$$R_n = 0.2$$

$$\gamma = 0.6$$

$$\rho_g = 0.036 \dots \rho_{\min} < \rho < \rho_{\max}$$

$$A_s = 0.036 * 300 * 300 = 3240 \text{ mm}^2 \text{ اعداد}$$

$$\text{no of bars} = \frac{3240}{490} = 6.6 \dots \text{use 7 bars}$$

DESIGN COL (9)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 14.38(5.25 * 3.8) + 1.67 * 3.8 + 1.675 * 2.5 + 19.6 + 10.5$$

$$P_u = 332 \text{ kn}$$

$$w_u x = \left[ \frac{14.38 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + \left[ \frac{14.38 * 4.25}{3} * \frac{3 - 0.8}{2} \right] + 1.67$$

$$w_u x = 59.56 \frac{\text{kn}}{\text{m}}$$

$$w_u y = \frac{14.38 * 6.25}{3} + 1.67 + 10.5 = 42.13 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{59.56 * 6.85}{16} = 279.5 \text{ kn.m}$$

$$m_u y = (42.13 * \frac{5.850}{16}) = 180.3 \text{ kn.m}$$

$$\frac{180.3}{279.5} = 0.65 < \frac{b}{h}$$

$$M_u eq = 352.35 \text{ kn.m}$$

$$\gamma = 0.7$$

$$k_n = 0.12$$

$$R_n = 0.31$$

$$\rho_g = 0.051 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.051 * 400 * 400 = 8160 \text{ mm}^2$$

$$\text{no of bars} = \frac{8160}{490} = 14.6$$

use 15  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 323.4 \text{ kn}$$

$$M_u eq = 385.3 \text{ kn.m}$$

$$K_n = 0.1$$

$$R_n = 0.4$$

$$\gamma = 0.6$$

$$\rho_g = \rho_{max} = 0.08$$

$$A_s = 0.08 * 300 * 300 = 7200 \text{ mm}^2$$

$$\text{no of bars} = \frac{7200}{490} = 13.06$$

use 14  $\theta$  25

DESIGN COL (10)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 14.38(5.25 * 5.4) + 1.67 * 5.25 + 1.67 * 5.4 + 19.6$$

$$P_u = 443.2 \text{ kn}$$

$$w_u x = \left[ \frac{14.38 * 4.25}{3} * \frac{3 - 0.8}{2} \right] + \left[ \frac{14.38 * 6.25}{2} * \frac{3 - 0.86}{2} \right] + 1.67$$

$$= 59.57 \frac{kn}{m}$$

$$w_u x = 2 \left[ \frac{14.38 * 3.5}{3} \right] + 1.67 = 35.22 \frac{kn}{m}$$

$$m_u x = \frac{59.57 * 6.85}{10} - \frac{35.22 * 3.1}{10} = 245.86 kn.m$$

$$w_u y = \frac{14.38 * 4.25}{3} + 1.67 = 22 \frac{kn}{m}$$

$$w_u y = \frac{14.38 * 6.25}{3} + 1.67 = 31.63 \frac{kn}{m}$$

$$m_u y = \frac{31.63 * 5.85}{10} - \frac{22 * 3.85}{10} = 75.6 kn.m$$

$$\frac{75.6}{245.86} = 0.3 < \frac{b}{h}$$

$$m_u eq = 245.86 + \frac{75.6 \left( \frac{0.4}{0.4} \right) (1 - 0.65)}{0.65} = 286.56 kn.m$$

$$\gamma = 0.7$$

$$k_n = 0.16$$

$$R_n = 0.26$$

$$\rho_g = 0.036 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.036 * 400 * 400 = 5760 mm^2$$

$$no \ of \ bars = \frac{5760}{490} = 11.7$$

use 12  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 434.6 \text{ kn}$$

$$M_u \text{ eq} = 297.36 \text{ kn.m}$$

$$K_n = 0.14$$

$$R_n = 0.3$$

$$\gamma = 0.6$$

$$\rho_g = 0.053 \dots \dots \rho_{\min} < \rho < \rho_{\max}$$

$$A_s = 0.053 * 300 * 300 = 4770 \text{ m}^2$$

$$\text{no of bars} = \frac{4770}{490} = 9.7$$

use 10  $\theta$  25

DESIGN COL (11)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 14.38(5.25 * 5.75) + 1.67 * 5.25 + 1.67 * 5.75 + 19.6$$

$$P_u = 472 \text{ kn}$$

$$w_u x = \frac{14.38 * 0.75}{3} + \left[ \frac{14.38 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 = 39.125 \frac{\text{kn}}{\text{m}}$$

$$w_u x = \frac{2(14.38 * 3.5)}{3} = 33.55 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{39.125 * 7.6}{10} - \frac{33.55 * 3.1}{10} = 193.75 \text{ kn.m}$$

$$w_u y = \left[ \frac{14.38 * 3.5}{3} * \frac{3 - 0.86}{2} \right] + \left[ \frac{14.38 * 6.25}{3} \right] + 1.67 = 54.16 \frac{\text{kn}}{\text{m}}$$

$$w_u y = \left[ \frac{14.38 * 0.75}{3} * \frac{3 - 0.18}{2} \right] + \left[ \frac{14.38 * 3.5}{3} * \frac{3 - 0.8}{2} \right] + 1.67 = 23.67 \frac{\text{kn}}{\text{m}}$$

$$\mu_y = \frac{54.16 * 5.85}{10} - \frac{26.67 * 3.85}{10}$$
$$= 145.8 \text{kn.m}$$

$$\frac{\mu_y}{\mu_x} = \frac{145.8}{193.75} = 0.75 < \frac{b}{h}$$

$$\mu_{eq} = 193.75 + \frac{145.8 \left(\frac{0.4}{0.4}\right) (1 - 0.65)}{0.65}$$
$$= 266.65 \text{kn.m}$$

$$k_n = 0.16$$

$$R_n = 0.23$$

$$\rho_g = .03$$

$$A_s = 0.031 * 400 * 400 = 4960 \text{mm}^2$$

$$\text{no of bars} = \frac{4960}{490} = 9.79$$

$$f_c = 50 \text{mpa}$$

$$P_u = 463.42 \text{kn}$$

$$M_u = 275.33 \text{kn}$$

$$K_n = 0.15$$

$$R_n = 0.29$$

$$\rho_g = 0.051$$

$$A_s = 0.051 * 300 * 300 = 4590 \text{mm}^2$$

$$\text{no of bars} = \frac{4590}{490} = 9.63$$

use 10  $\theta$  25

DESIGN COL(12)

$F_c' = 25 \text{ mpa}$

$P_u = 14.38(4 \times 5.25) + 1.67 \times 4 + 1.67 \times 5.25 + 19.6$

$P_u = 337 \text{ kn}$

$$w_{u y} = \left[ \frac{14.38 \times 2.75}{3} * \frac{3 - 0.64}{2} \right] + 1.67 = 18.68 \frac{\text{kn}}{\text{m}}$$

$$w_{u y} = \left[ \frac{14.38 \times 6.25}{3} \right] + 1.67 = 31.63 \frac{\text{kn}}{\text{m}}$$

$$m_{u y} = \frac{31.63 \times 5.85}{10} - \frac{18.68 \times 3.85}{10} = 80.56 \text{ kn.m}$$

$$w_{u x} = \left[ \frac{14.38 \times 2.75}{3} + \frac{14.38 \times 6.25}{3} * \frac{3 - 0.78}{2} \right] + 1.67$$
$$= 47.3 \frac{\text{kn}}{\text{m}}$$

$$m_{u x} = \frac{47.3 \times 7.6}{16} = 170.753 \text{ kn.m}$$

$$\frac{80.56}{170.753} = 0.47 < \frac{b}{h}$$

$m_{u eq} = 214.13 \text{ kn.m}$

$k_n = 0.12$

$R_n = 0.2$

$\rho_g = 0.028$

$A_S = 0.028 \times 400 \times 400 = 4480 \text{ mm}$

$$\text{no of bars} = \frac{4480}{490} = 9.12$$

use 10  $\theta$  25

$F_c' = 50 \text{ mpa}$



$$P_u = 328.4 \text{ kn}$$

$$M_u \text{ eq} = 221.32 \text{ kn.m}$$

$$K_n = 0.1$$

$$R_n = 0.23$$

$$\gamma = 0.6$$

$$\rho_g = 0.029 \dots \dots \rho_{\min} < \rho < \rho_{\max}$$

$$A_s = 0.029 * 300 * 300 = 2160$$

$$\text{no of bars} = \frac{2160}{490} = 5.3$$

use 6  $\theta$  25

مشروع التخرج لنيل دبلوم الهندسة المعمارية  
سبأ عمران

مرورة فائق  
محمد عبد خلهن

سجى عدنان  
نور كمال

اشراف

م.م. علي عبد سلطان

DESIGN COL(1)

$W_u = 15 \text{ kn/m}$

Partition =  $3.5 * 0.25 * 20 * 1.4 = 24.5 \text{ kn/m}$

Weight of stem =  $1.67 \text{ kn/m}$

Dimension of column =  $(450 \text{ mm} * 450 \text{ mm})$

Weight of column =  $(0.45 * 0.45 * 3.5 * 25 * 1.4) = 23.8 \text{ kn/m}$

$F_c = 25 \text{ mpa}$

$P_u = 131.6 + (15 * 2.27 * 2.85) + (1.67 * 2.27) + (1.67 * 2.85) + 23.8 + 24.5$

$P_u = 285.5 \text{ kn}$

$$w_{u x} = \left[ \frac{15 * 4.25}{3} * \frac{3 - 0.78}{2} \right] + 1.67 + 24.5 = 51.46 \text{ kn/m}$$

$$w_{u y} = \left[ \frac{15 * 4.25}{3} \right] + 1.67 + 24.5 = 47.42 \frac{\text{kn}}{\text{m}}$$

$$m_{u x} = \frac{51.46 * 4.25}{16} = 160.8 \text{ kn.m}$$

$$m_{u y} = \frac{47.42 * 3.8}{16} = 70.29 \text{ kn.m}$$

$$\frac{m_{u y}}{m_{u x}} = \frac{70.29}{160.8} = 0.43 < \frac{b}{h} =$$

$$m_{u eq} = 160.8 + \frac{70.29 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65} = 195.95 \text{ kn.m}$$

$$k_n = \frac{285.5}{0.7 * 25 * 0.45 * 0.45 * 1000} = 0.08$$

$$R_n = \frac{195.95}{0.7 * 0.45 * 0.45 * 0.45 * 25 * 1000} = 0.12$$

$$\gamma = 0.7$$

$$\rho_g = 0.015 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.015 * 450 * 450 = 3038 \text{ mm}^2$$

$$\text{No of bars} = 3038/490 = 6.45$$

use 7  $\theta$  25

$$F_c = 50 \text{ mpa}$$

$$\text{Dimension of column} = 400 * 400 \text{ mm}$$

$$P_u = 281.3 \text{ kn}$$

$$M_u \text{ eq} = 195.95 \text{ kn.m}$$

$$K_n = 0.05$$

$$R_n = 0.09$$

$$\gamma = 0.7$$

$$\rho_g = \rho_{min} = 0.01$$

$$A_s = 0.01 * 400 * 400 = 1600 \text{ mm}^2$$

$$\text{no of bars} = \frac{1600}{490} = 3.2$$

use 4  $\theta$  25

DESIGN COL(2)

$$F_c = 25 \text{ mpa}$$

$$P_u = 168.6 + (15 * 2.85 * 3.125) + (1.67 * 2.85) + (1.67 * 3.125) + 23.8 + 24.5$$

$$P_u = 360.47 \text{ kn}$$

$$w_u x = \left[ \frac{15 * 4.25}{3} * \frac{3 - 0.78}{2} \right] + \frac{15 * 2}{2} + 1.67 + 24.5 = 66.446 \frac{\text{kn}}{\text{m}}$$

$$w_u y = \left[ \left( 15 * \frac{4.250}{3} \right) \right] + 1.67 + 24.5 = 47.42 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{66.46 * 5}{16} = 207.68 \text{ kn.m}$$

$$m_u y = \frac{47.42 * 3.8}{10} = 70.29 \text{ kn.m}$$

$$\frac{70.29}{207.68} = 0.338 < \frac{b}{h} = 1$$

$$\mu_{eq} = 207.68 + \frac{70.29 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65}$$

$$= 242.8 \text{ kn.m}$$

$$\gamma = 0.7$$

$$k_n = 0.1$$

$$R_n = 0.15$$

$$\rho_g = 0.02 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.02 * 450 * 450 = 4050 \text{ mm}^2$$

$$\text{no of bars} = \frac{4050}{490} = 8.2$$

use 9  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 356.27 \text{ kn}$$

$$\mu_{eq} = 242.8 \text{ kn.m}$$

$$K_n = 0.06$$

$$R_n = 0.08$$

$$\rho_g = 0.012 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.012 * 400 * 400 = 1920 \text{ mm}^2$$

$$\text{no of bar} = \frac{1920}{490} = 3.9$$

use 4  $\theta$  25

DESIGN COL(3)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 257 + (15 * 4.125 * 3.78) + 1.67 * 4.125 + 1.67 * 3.787 + 23.8 + 24.5$$

$$P_u = 552.38 \text{ kn}$$

$$w_u x = \left[ \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = 76.48 \frac{kn}{m}$$

$$w_u y = \left[ \frac{15 * 6.25}{3} \right] + 1.67 + 24.5 = 57.42 \frac{kn}{m}$$

$$m_u x = \frac{(76.48 * 6.8)}{10} = 353.6 kn.m$$

$$m_u y = \frac{57.42 * 5.8}{10} = 193.16 kn.m$$

$$\frac{193.16}{353.6} = 0.55 < \frac{b}{h} = 1$$

$$m_u eq = 353.6 + \frac{193.16 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65} = 455.97 kn.m$$

$$K_n = 0.15$$

$$R_n = 0.28$$

$$\gamma = 0.7$$

$$\rho_g = 0.042 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.042 * 450 * 450 = 8505 mm^2$$

$$no \ of \ bars = \frac{8505}{490} = 17.3$$

$$f_c' = 50 \text{ mpa}$$

$$P_u = 5480.18 \text{ kn}$$

$$M_u eq = 457.11 \text{ kn.m}$$

$$K_n = 0.09$$

$$R_n = 0.02$$

$$\gamma = 0.7$$

$$\rho_g = 0.031 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.031 * 400 * 400 = 4960 \text{mm}^2$$

$$\text{no of bars} = \frac{4960}{490} = 10.12$$

use 11  $\theta$  25

DESIGN COL(4)

$$F_c = 25 \text{mpa}$$

$$P_u = 211.8 + (15 * 3.8 * 3.5) + 1.67 * 3.8 + 1.67 * 3.5 + 23.8 + 24.5$$

$$P_u = 460 \text{kn}$$

$$w_{u x} = \left[ \frac{15 * 6.25}{3} * \frac{3 - .86}{2} \right] + 1.67 + 24.5 = 61.49 \frac{\text{kn}}{\text{m}}$$

$$w_{u y} = \left[ \frac{15 * 6.25}{3} \right] + 1.67 + 24.5 = 57.42 \frac{\text{kn}}{\text{m}}$$

$$m_{u x} = \frac{61.49 * 6.8}{16} = 177.7 \text{kn.m}$$

$$m_{u y} = \frac{57.42 * 5.8}{16} = 120.72 \text{kn.m}$$

$$\frac{120.72}{177.7} = 0.68 < \frac{b}{h} = 1$$

$$m_{u eq} = 177.7 + \frac{120.72 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65} = 253.06 \text{kn.m}$$

$$K_n = 0.13$$

$$R_n = 0.16$$

$$\rho_g = 0.021 \dots \dots \rho_{min} < \rho < \rho_{min}$$

$$A_s = 0.021 * 450 * 450 = 4252 \text{mm}^2$$

$$\text{no of bars} = \frac{4252}{490} = 8.6$$

use 9  $\theta$  25

$F_c = 50 \text{mpa}$

$P_u = 455.08 \text{kn}$

$M_u \text{ eq} = 245.42 \text{kn.m}$

$K_n = 0.08$

$R_n = 0.1$

$\rho_g = 0.012$

$$A_s = 0.012 * 400 * 400 = 1920 \text{mm}^2$$

$$\text{no of bars} = \frac{1920}{490} = 3.9$$

use 4  $\theta$  25

DESIGN COL(5)

$F_c = 25 \text{mpa}$

$$P_u = 533.5 + (15 * 5.5 * 6.25) + 1.67 * 6.25 + 1.67 * 5.5 + 23.8 + 24.5$$

$P_u = 1117 \text{kn}$

$$w_u x = 2 \left[ \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = 96.8 \frac{\text{kn}}{\text{m}}$$

$$w_u x = 2 \left[ \frac{15 * 3.5}{3} \right] + 1.67 + 24.5 = 61.8 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{96.8 * 6.8}{10} - \frac{61.17 * 2.8}{10} = 424.2 \text{kn.m}$$

$m_u y = 0$

$K_n = 0.3$

$R_n = 0.4$

$$\rho_g = 0.045$$

$$A_s = 0.045 * 450 * 450 = 9112 \text{mm}^2$$

$$\text{no of bars} = \frac{9112}{490} = 18.6$$

use 19  $\theta$  25

$$F_c' = 50 \text{mpa}$$

$$P_u = 1112.8 \text{kn}$$

$$M_u \text{ eq} = 429.18 \text{kn.m}$$

$$K_n = 0.19$$

$$R_n = 0.2$$

$$\rho_g = 0.025$$

$$A_s = 0.025 * 400 * 400 = 4000 \text{mm}^2$$

$$\text{no of bars} = \frac{4000}{490} = 9.16$$

use 10  $\theta$  25

DESIGN COL(6)

$$F_c' = 25 \text{mpa}$$

$$P_u = 107.8 + (15 * 6.25 * 3.8) + 1.67 * 3.8 + 1.67 * 6.25 + 23.8 + 24.5$$

$$P_u = 529.11 \text{kn}$$

$$w_u x = \left[ \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = \frac{96.7 \text{kn}}{m}$$

$$w_u y = \frac{15 * 6.25}{3} + 1.67 + 24.5 = 57.42 \frac{\text{kn}}{m}$$

$$m_u x = \frac{96.7 * 6.8}{16} = 279.5 \text{kn.m}$$

$$m_u y = \frac{57.42 * 5.8}{10} = 193.16 \text{kn.m}$$



$$\frac{193.16}{279.5} = 0.69 < \frac{b}{h} = 1$$

$$mu_{eq} = 279.5 + \frac{193.16 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65} = 376 \text{ kn.m}$$

$$K_n = 0.15$$

$$R_n = 0.23$$

$$\rho_g = 0.032$$

$$A_s = 0.032 * 450 * 450 = 6480 \text{ mm}^2 \quad \text{اعداد}$$

$$\text{no of bars} = \frac{6480}{490} = 13.2$$

$$F_c' = 50 \text{ mpa}$$

$$P_u = 524.9 \text{ kn}$$

$$M_u \text{ eq} = 387.75 \text{ kn.m}$$

$$K_n = 0.09$$

$$R_n = 0.17$$

$$\rho_g = 0.024 \dots \dots \rho_{min} < \rho < \rho_{max}$$

$$A_s = 0.024 * 400 * 400 = 3840 \text{ mm}^2$$

$$\text{no of bars} = \frac{3840}{490} = 7.8$$

use 8 @ 25

DESIGN COL(7)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 522 + (15 * 5.375 * 6.25) + 1.67 * 6.25 + 1.67 * 35.375 + 23.8 + 24.5$$

$$P_u = 1093.4 \text{ kn}$$

$$w_u x = \frac{2(15 * 3.5)}{3} + 1.67 + 24.5 = 61.17 \frac{kn}{m}$$

$$w_u x = \frac{(15 * 6.25)}{3} * \frac{3 - 0.86}{2} + 1.67 + 24.5 = 61.48 \frac{kn}{m}$$

$$m_u x = \frac{61.48 * 6.8}{10} - \frac{61.17 * 3.05}{10} = 227.4 kn.m$$

$$w_u y = \frac{15 * 6.25}{3} + 1.67 + 24.5 = 57.42 kn/m$$

$$m_u y = \frac{57.42 * 5.8}{10} = 193.16 kn.m$$

$$\frac{m_u y}{m_u x} = \frac{193.16}{227.4} = 0.85 < \frac{b}{h} = 1$$

$$k_n = 0.3$$

$$R_n = 0.2$$

$$\gamma = 0.7$$

$$\rho_g = 0.02$$

$$A_s = 0.02 * 450 * 450 = 4050 mm^2$$

$$no \ of \ bars = \frac{4050}{490} = 8.26$$

$$use \ 9 \ \theta \ 25$$

$$F_c = 50 \text{ mpa}$$

$$P_u = 1089 \text{ kn}$$

$$M_u \text{ eq} = 333.85 \text{ kn.m}$$

$$K_n = 0.19$$

$$R_n = 0.15$$

$$P_g = 0.015 \dots \rho_{min} < \rho < \rho_{max}$$

$$AS=0.015*400*400=2400\text{mm}^2$$

$$\text{No of bars}=2400/490=4.8$$

use 5  $\theta$  25

DESIGN COL(8)

$$F_c'=25\text{mpa}$$

$$P_u=225+(15*3.325*3.325)+1.67*3.325+1.67*3.325+23.8+24.5$$

$$P_u=476\text{kn}$$

$$w_u x = \left[ \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = 61.5 \frac{\text{kn}}{\text{m}}$$

$$w_u y = \frac{15 * 6.25}{3} + 1.67 + 24.5 = 57.42 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{61.5 * 6.8}{16} = 177.7 \text{kn.m}$$

$$m_u y = \frac{57.42 * 5.8}{16} = 120.72 \text{kn.m}$$

$$\frac{m_u y}{m_u x} = \frac{120.72}{177.7} = 0.68 < \frac{b}{h} = 1$$

$$m_u eq = 177.7 + 120.72 \left( \frac{0.45}{0.45} \right) \left( 1 - \frac{0.650}{0.65} \right) = 238.06 \text{kn.m}$$

$$K_n=0.13$$

$$R_n=0.15$$

$$\rho_g = 0.019$$

$$AS=0.019*450*450=3847.5\text{mm}^2$$

$$\text{no of bars} = \frac{3847.5}{490} = 7.85$$

use 8  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 471.8 \text{ kn}$$

$$M_u \text{ eq} = 245.45 \text{ kn.m}$$

$$K_n = 0.08$$

$$R_n = 0.1$$

$$\rho_g = 0.012$$

$$A_s = 0.012 * 400 * 400 = 1920 \text{ mm}^2$$

$$\text{no of bars} = \frac{1920}{490} = 3.9$$

use 4  $\theta$  25

DESIGN COL (9)

$$P_u = 332 + (15 * 5.75 * 3.8) + 1.67 * 3.8 + 1.67 * 5.25 + 23.8 + 24.5$$

$$P_u = 694.6 \text{ kn}$$

$$w_u x = \left[ \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = 86.48 \frac{\text{kn}}{\text{m}}$$

$$w_u y = \left[ \frac{15 * 6.25}{3} \right] * 1.67 + 24.5 = 57.42 \frac{\text{kn}}{\text{m}}$$

$$m_u y = \frac{57.42 * 5.8}{16} = 120.72 \text{ kn.m}$$

$$m_u x = \frac{86.48 * 6.8}{16} = 249.93 \text{ kn.m}$$

$$\frac{120.72}{249.93} = 0.48 < \frac{b}{h} = 1$$

$$m_u \text{ eq} = 249.9 + \frac{120.72 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65} = 310.29 \text{ kn.m}$$

$$k_n = 0.2$$

$$R_n = 0.19$$

$$\rho_g = 0.022 \dots \dots \rho_{min} < \rho_g < \rho_{max}$$

$$AS = 0.022 * 450 * 450 = 4455 \text{mm}^2$$

$$\text{no of bars} = \frac{4455}{490} = 9.09$$

use 10  $\theta$  25

$$F_c = 50 \text{mpa}$$

$$P_u = 690.4 \text{kn}$$

$$M_u \text{ eq} = 318.69 \text{kn.m}$$

$$K_n = 0.12$$

$$R_n = 0.14$$

$$\rho_g = 0.018 \dots \dots \rho_{min} < \rho_g < \rho_{max}$$

$$AS = 0.018 * 400 * 400 = 2880 \text{mm}^2$$

$$\text{no of bars} = \frac{2880}{490} = 5.8$$

use 6  $\theta$  25

DESIGN COL(10)

$$P_u = 934.5 \text{kn}$$

$$w_u x = 2 \left[ \frac{15 * 3.5}{3} \right] + 1.67 + 24.5 = 61.17 \frac{\text{kn}}{\text{m}}$$

$$w_u x = \left[ \frac{15 * 4.25}{3} * \frac{3 - .45}{2} \right] + \left[ \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5$$

$$w_u x = 86.5 \text{kn.m}$$

$$m_u x = \left[ \frac{86.5 * 6.8}{10} - \frac{61.17 * 3.05}{10} \right] = 343 \text{kn.m}$$

$$w_u y = \left[ \frac{15 * 6.25}{3} \right] + 1.67 + 24.5 = 57.42 \frac{kn}{m}$$

$$w_u y = \left[ \frac{15 * 4.25}{3} \right] + 1.67 + 24.5 = 47.42 \frac{kn}{m}$$

$$m_u y = \frac{57.42 * 5.8}{10} - \frac{47.42 * 3.8}{10} = 124.68 kn.m$$

$$\frac{m_u y}{m_u x} = \frac{124.68}{343} = 0.36 < \frac{b}{h} = 1$$

$$m_u eq = 343 + 124.68 \left( \frac{0.45}{0.45} \right) \left( 1 - \frac{0.650}{0.65} \right) = 405.34 kn.m$$

$$k_n = 0.26$$

$$R_n = 0.25$$

$$\rho_g = 0.032 \dots \dots \rho_{min} < \rho_g < \rho_{max}$$

$$A_s = 0.032 * 450 * 450 = 6480 mm^2$$

$$no \ of \ bars = \frac{6480}{490} = 13.2$$

use 14  $\theta$  25

$$f_c' = 50 mpa$$

$$P_u = 930.3 kn$$

$$m_u eq = 416.16 kn.m$$

$$k_n = 0.16$$

$$R_n = 0.18$$

$$\rho_g = 0.022$$

$$A_s = 0.022 * 400 * 400 = 3520 mm^2$$

$$no \ of \ bars = \frac{3520}{490} = 7.15$$

use 8  $\theta$  25

DESIGN COL(11)

$F_c = 25 \text{ mpa}$

$P_u = 472 + (15 * 5.75 * 5.25) + 1.67 * 5.75 + 1.67 * 5.25 + 23.8 + 24.5$

$P_u = 998 \text{ kn}$

$$w_{u x} = \left[ \frac{15 * 0.75}{3} + \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = 65.22 \frac{\text{kn}}{\text{m}}$$

$$w_{u x} = 2 \left[ \frac{15 * 3.5}{3} \right] + 1.67 + 24.5 = 61.17 \frac{\text{kn}}{\text{m}}$$

$$m_{u x} = \frac{65.22 * 7.55}{10} - \frac{61.17 * 2.8}{10} = 314.8 \text{ kn.m}$$

$$w_{u y} = \left[ \frac{15 * 3.5}{3} * \frac{3 - 0.56}{2} + \frac{15 * 6.25}{3} \right] + 1.67 + 24.5 = 80.92 \frac{\text{kn}}{\text{m}}$$

$$w_{u y} = \left[ \frac{15 * 0.75}{3} * \frac{3 - 0.18}{2} + \frac{15 * 3.5}{3} * \frac{3 - 0.8}{2} \right] + 1.67 + 24.5$$
$$= 52.38 \frac{\text{kn}}{\text{m}}$$

$$m_{u y} = \frac{80.92 * 5.8}{10} - \frac{52.38 * 3.8}{10} = 196.56 \text{ kn.m}$$

$$\frac{m_{u y}}{m_{u x}} = \frac{196.56}{314.8} = 0.62 < \frac{b}{h} = 1 \dots \dots \mu_{eq} = 413 \text{ kn.m}$$

$k_n = 0.28$

$R_n = 0.26$

$\rho_g = 0.028 \dots \dots \rho_{min} < \rho_g < \rho_{max}$

$A_s = 0.028 * 450 * 450 = 5670 \text{ mm}^2$

$$\text{no of bars} = \frac{5670}{490} = 11.57$$

use 12  $\theta$  25

$$F_c' = 50 \text{ mpa}$$

$$P_u = 982.8 \text{ kn}$$

$$M_u \text{ eq} = 422.15 \text{ kn.m}$$

$$K_n = 0.17$$

$$R_n = 0.18$$

$$\rho_g = .022$$

$$A_s = 0.022 * 400 * 400 = 3520 \text{ mm}^2$$

$$\text{no of bars} = \frac{3520}{490} = 7.1$$

use 8  $\theta$  25

DESIGN COL(12)

$$F_c' = 25 \text{ mpa}$$

$$P_u = 337 + (15 * 5.25 * 4) + 1.67 * 5.25 + 1.67 * 4 + 24.5 + 23.8$$

$$P_u = 715.7 \text{ kn}$$

$$w_u x = \left[ \frac{15 * 2.75}{3} + \frac{15 * 6.25}{3} * \frac{3 - 0.86}{2} \right] + 1.67 + 24.5 = 75.22 \frac{\text{kn}}{\text{m}}$$

$$m_u x = \frac{75.22 * 7.55}{16} = 267.98 \text{ kn.m}$$

$$w_u y = \left[ \frac{15 * 2.75}{3} * \frac{3 - 0.64}{2} \right] + 1.67 + 24.5 = 43.9 \frac{\text{kn}}{\text{m}}$$

$$w_u y = \frac{15 * 6.25}{3} + 1.67 + 24.5 = 57.42 \frac{\text{kn}}{\text{m}}$$

$$m_u y = \frac{57.42 * 5.8}{10} - \frac{43.9 * 3.8}{10} = 129.77 \text{ kn.m}$$

$$\frac{m_u y}{m_u x} = \frac{129.77}{267.98} = 0.48 < \frac{b}{h} = 1$$

$$m_{ueq} = 267.98 + \frac{129.77 \left( \frac{0.45}{0.45} \right) (1 - 0.65)}{0.65} = 332.86 \text{ kn.m}$$



$$K_n=0.2$$

$$R_n=0.2$$

$$\rho_g = 0.024$$

$$A_s=0.024*450*450=4860\text{mm}^2$$

$$\text{no of bars} = \frac{4860}{490} = 9.9$$

use 10  $\theta$  25

$$F_c'=50\text{mpa}$$

$$P_u=711.5\text{kn}$$

$$M_u \text{ eq}=342\text{kn.m}$$

$$K_n=0.13$$

$$R_n=.015$$

$$\rho_g = 0.018$$

$$A_s=0.018*400*400=2880\text{mm}^2$$

$$\text{no of bars} = \frac{2880}{490} = 5.8$$

use 6  $\theta$  25

مشروع التخرج لنيل درجة البكالوريوس

اعداد

مروة فائق

سبأ عمران

محمد عبد خلهن

نور كمال

سجى عدنان

اشراف


م.م. علي عبد سلطان

## DESIGN SLAB(7)

$$L_a/L_b=6/3.25=1.8$$

Design as two way slab

$$M=0.55$$

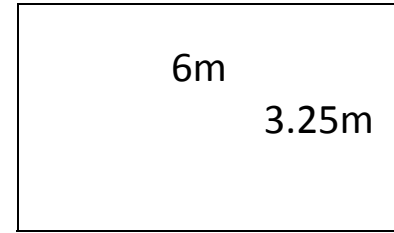

$m^-$	$M^+ DL$	$M^+ LL$	W Load
$C_a=0.089$ $C_b=0.007$	$C_a=0.035$ $C_b=0.003$	$C_a=0.062$ $C_b=0.006$	$W_a=0.92$ $W_b=0.08$

Short direction

$$M_a^- = 0.084 \cdot 15 \cdot (3.25)^2$$

$$M_a^- = 13.3 \text{ kn.m}$$

$$M_a^+ = [0.035 \cdot 8.2 + 0.062 \cdot 6.8] \cdot (3.25)^2$$

$$M_a^+ = 7.5 \text{ kn.m}$$

Long direction

$$M_b^- = 0.007 \cdot 15 \cdot (6)^2 = 3.78 \text{ kn.m}$$

$$M_b^+ = [0.003 \cdot 8.2 + 0.006 \cdot 6.8] \cdot (6)^2 = 2.35 \text{ kn.m}$$

Short direction

$$f_c = 25 \text{ mpa}$$

$$d_a = 160 - 20 - 12/2 = 134 \text{ mm}$$

$$\text{max moment} = 13.3 \text{ kn.m}$$

$$\rho = 0.002$$

$$\rho_{min} = 0.0033$$

$$\rho_{max} = 0.02$$

$$\rho = \rho_{min} = 0.0033$$

$$A_s = 0.0033 * 1000 * 134$$

$$A_s = 442.2 \text{ mm}^2$$

Long direction

$$d_b = 122 \text{ mm}$$

$$\text{max moment} = 3.78 \text{ kn.m}$$

$$f_c' = 25 \text{ mpa}$$

$$\rho = 0.00068$$

$$\rho = \rho_{min} = 0.0033$$

$$A_s = 0.0033 * 1000 * 122$$

$$A_s = 403 \text{ mm}$$

$$S = \min \left[ 1000 * \frac{113}{403}, 2 * 160, 500 \right]$$

$$S = 280 \text{ mm}$$

$$\text{no of bars} = \frac{A_s}{A_b} = \frac{403}{113} = 4 \text{ bars @ each (1m)}$$

$$F_c' = 50 \text{ mpa}$$

$$\rho = 0.00674$$

$$\rho = \rho_{min}$$

$$A_s = 0.0033 * 1000 * 122 = 403 \text{ mm}$$

$$S = \min \left[ 1000 * \frac{113}{403}, 320, 500 \right]$$

$$S = 280 \text{ mm}$$

$$\text{no of bars} = \frac{403}{113} = 4 \text{ bars @ each (1m)}$$

Check shear

$$W = w_u \cdot L_a \cdot L_b$$

$$W = 15 \cdot 6 \cdot 3.25 = 293$$

$$W_a = W \cdot w_a = 293 \cdot 0.92 = 270$$

$$W_b = W \cdot w_b = 293 \cdot 0.08 = 23$$

$$V_a = 23$$

$$V_b = 4$$

$$V_a > v_b$$

$$\frac{23 - 15 \cdot 0.92 \cdot 0.134}{0.85} = 25 \text{ kn}$$

$$V_c = 0.17 \cdot \sqrt{f_c'} \cdot b \cdot d$$

$$f_c' = 25 \text{ mpa} \dots\dots V_c = 108.8 > 25 \text{ kn} \dots\dots \text{ok}$$

$$f_c' = 50 \text{ mpa} \dots\dots V_c = 154 > 25 \text{ kn} \dots\dots \text{ok}$$

اشراف

م.م. علي عبد سلطان

DESIGN SLAB(6)

1.75m

$$\frac{L_a}{L_b} = \frac{5.15}{1.75} = 2.9 > 2$$

5.15m

design as one way slab

$$d = 160 - 20 - \frac{12}{2} = 134\text{mm}$$

$$m_u = \frac{w_u * l_n^2}{10} = \frac{15 * 1.75^2}{10} = 4.6\text{kn.m}$$

$$m_u = \frac{15 * 1.75^2}{11} = 4\text{kn.m}$$

$$m_u = \frac{15 * 1.75^2}{16} = 3\text{kn.m}$$

max moment = 4.6kn.m

$$f_c' = 25\text{mpa}$$

$$\rho = 0.00068$$

$$\rho = \rho_{min}$$

$$A_s = 0.0033 * 1000 * 134 = 442.2\text{mm}^2$$

$$A_{s\ min} = 0.0018 * 1000 * 160 = 241.2\text{mm}^2$$

$$S = \min \left[ 1000 * \frac{113}{442.2}, 480, 500 \right]$$

$$S = 250\text{mm}$$

Spacing for shrinkage and temperature

$$S = \min \left[ 1000 * \frac{113}{241.2}, 800, 500 \right]$$

$$S = 460\text{mm}$$

$$\text{no of bars} = \frac{442.2}{113} = 4 @ \text{each (1m)}$$

$$f_c = 50 \text{mpa}$$

$$\rho = \rho_{\min} = 0.0033$$

$$AS = \rho * b * d$$

$$AS = 0.0033 * 1000 * 134$$

$$AS = 442.2 \text{mm}$$

$$S = 250 \text{mm}$$

$$S \text{ shrinkage and temp} = 460 \text{mm}$$

$$\text{No of bars} = 4 @ \text{each (1m)}$$

مشروع التخرج لنيل درجة البكالوريوس  
اعداد  
سبأ عمران  
مروة فائق  
محمد عبد خلهن  
سجى عدنان  
نور كمال

اشراف


م.م. علي عبد سلطان

DESIGN SLAB( )

$$L_b/L_a=4.75/3.25=1.46$$

Design as two way slab

$$M=0.7$$

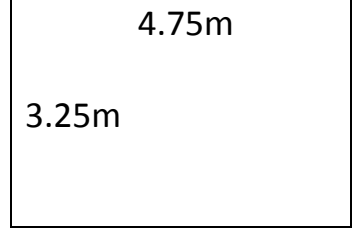

M <sup>-</sup>	M <sup>+DL</sup>	M <sup>+DL</sup>	W Load
ca=0.068 cb=0.029	Ca=0.04 Cb=0.011	Ca=0.054 Cb=0.014	Wa=0.68 Wb=0.32

short direction

$$M_a^- = 0.068 * 15 * (3.25)^2 = 10.77 \text{ kn.m}$$

$$M_a^+ = [0.04 * 8.2 + 0.054 * 6.8] * (3.25)^2 = 7.3 \text{ kn.m}$$

Long direction

$$M_b^- = 0.029 * 15 * (4.75)^2 = 9.8 \text{ kn.m}$$

$$M_b^+ = [0.011 * 8.2 + 0.014 * 6.8] * (4.75)^2 = 4.2 \text{ kn.m}$$

Short direction

$$d_a = 134 \text{ mm}$$

$$\text{max moment} = 10.77 \text{ kn.m}$$

$$f_c = 25 \text{ mpa}$$

$$\rho = 0.0016$$

$$\rho = \rho_{min} = 0.0033$$

$$A_s = 0.0033 * 1000 * 134 = 442.2 \text{ mm}^2$$

$$S = \min \left[ 1000 * \frac{113}{442.2}, 320, 500 \right]$$

$$S = 250 \text{ mm}$$

No of bars=4 bars @ (1m)

Long direction

db=122mm

max moment=9.8kn.m

$\rho = 0.0018$

$\rho = \rho_{min} = 0.0033$

$AS=0.0033*1000*122=403\text{mm}^2$

$S = \min \left[ 1000 * \frac{113}{403}, 320, 500 \right]$

S=280mm

No of bars=4 bars @ (1m)

$F_c = 50\text{mpa}$

$\rho = 0.00175$

$\rho = \rho_{min} = 0.0033$

$AS=0.0033*1000*122=403\text{mm}^2$

$S = \min [1000 * 113 / 403, 320, 500]$

S=280mm

No of bars=4 bars @ (1m)

CHECK SHEAR

$W = w_u * L_a * L_b = 15 * 4.75 * 3.25$

W=232

$W_a = 232 * 0.68 = 158$

$W_b = 232 * 0.32 = 72.24$



$$v_a = 17$$

$$v_b = 11$$

$$v_a > v_b$$

$$\frac{v_a - W * w_a * d_a}{\theta} = \frac{17 - 15 * 0.68 * 0.134}{0.85}$$
$$= 18kn$$

$$F_c' = 25mpa$$

$$V_c = 108.8 > 18kn \dots\dots ok$$

$$F_c' = 50mpa$$

$$V_c = 154 > 18kn \dots\dots ok$$

مشروع التخرج لنيل درجة البكالوريوس  
اعداد  
سبأ عمران  
مروة فائق  
محمد عبد خلهن  
سجى عدنان  
نور كمال  
اشراف  
م.م. علي عبد سلطان

## VOLUME OF CONCRETE SLABS

$$\text{Slab (1)}=6.25*7.25*0.16=7.25\text{m}^3$$

$$\text{Slab (2)}=6.25*8*0.16=8\text{m}^3$$

$$\text{Slab (3)}=6.25*7.25*0.16=7.25\text{m}^3$$

$$\text{Slab (4)}=5.4*4.25*0.16=3.672\text{m}^3$$

$$\text{Slab (5)}=4.25*3.5*0.16=2.38\text{m}^3$$

$$\text{Slab (6)}=2*5.4*0.16=1.728\text{m}^3$$

$$\text{Slab (7)}=3.5*6.25*0.16=3.5\text{m}^3$$

$$\text{Total volume of concrete for one story}=33.78\text{m}^3$$

$$\text{Total volume for two story}=67.56\text{m}^3$$

## VOLUME OF BEAMS CONCRETE

$$f_c=25\text{mpa}$$

$$\text{Volume of beams}=0.35*0.25*243.6=21.315\text{m}^3$$

$$\text{Volume of beams for two story}=42.63\text{m}^3$$

$$f_c=50\text{mpa}$$

$$\text{Volume of beams}=0.3*0.2*243.6=14.616\text{m}^3$$

$$\text{Volume of beams for two story}=29.232\text{m}^3$$

## VOLUME OF COLUMNS CONCRETE

Ground plan

$$F_c=25\text{mpa}$$

$$\text{Volume of columns}=0.45*0.45*3.5*32=22.68\text{m}^3$$

$$F_c=50\text{mpa}$$

$$\text{Volume of columns}=0.4*0.4*3.5*32=17.92\text{m}^3$$

First story

$$F_c=25\text{mpa}$$

$$\text{Volume of columns} = 0.4 \times 0.4 \times 3.5 \times 23 = 17.92 \text{m}^3$$

$$F_c = 50 \text{mpa}$$

$$\text{Volume of columns} = 0.3 \times 0.3 \times 3.5 \times 32 = 10.08 \text{m}^3$$

$$\text{Total volume at } f_c = 25 \text{mpa}$$

$$\text{Total volume} = 22.68 + 17.92 = 40.6 \text{m}^3$$

$$\text{Total volume at } f_c = 50 \text{mpa}$$

$$\text{Total volume} = 17.92 + 10.08 = 28 \text{m}^3$$

Type of concrete	$F_c = 25 \text{mpa}$	$F_c = 50 \text{mpa}$
slabs	$67.56 \text{m}^3$	$67.56 \text{m}^3$
beams	$42.63 \text{m}^3$	$29.232 \text{m}^3$
columns	$40.6 \text{m}^3$	$28 \text{m}^3$
Total volume of concrete	$150.79 \text{m}^3$	$124.792 \text{m}^3$

$$\text{Total cost} = 150.79 \times 450000 = 70000000 \text{dinar} \quad f_c = 25 \text{mpa}$$

$$\text{cost of stabilizer} = 80000 \text{dinar/m}^3$$

$$\text{amount of stabilizer} = 18 \text{ liter/m}^3$$

$$\text{Total cost} = 124.792 \times 45000 \times 18 \times 80000 = 80 \times 10^{10} \quad \dots f_c = 50 \text{mpa}$$

## CALCULATION OF REINFORCEMENT AMOUNT

Ground plan

$F_c = 25 \text{ mpa}$

Col 1 =  $7 * 5.5 * 3.855 = 148.4 \text{ kg}$

Col 2 =  $9 * 5.5 * 3.855 = 190.822 \text{ kg}$

Col 3 =  $16 * 5.5 * 3.855 = 339.24 \text{ kg}$

Col 4 =  $9 * 5.5 * 3.855 = 190.822 \text{ kg}$

Col 5 =  $18 * 5.5 * 3.855 = 381.645 \text{ kg}$

Col 6 =  $15 * 5.5 * 3.855 = 318.375 \text{ kg}$

Col 7 =  $9 * 5.5 * 3.855 = 190.822 \text{ kg}$

Col 8 =  $8 * 5.5 * 3.855 = 169.62 \text{ kg}$

Col 9 =  $10 * 5.5 * 3.855 = 212 \text{ kg}$

Col 10 =  $14 * 5.5 * 3.855 = 296.835 \text{ kg}$

Col 11 =  $14 * 5.5 * 3.855 = 296.835 \text{ kg}$

Col 12 =  $10 * 5.5 * 3.855 = 212 \text{ kg}$

Total of reinforcement amount =  $2974.95 * 2 = 5949.9 \text{ kg}$

Total of reinforcement amount = 6ton

$F_c = 50 \text{ mpa}$

Col 1 =  $4 * 5.5 * 3.855 = 84.81 \text{ kg}$

Col 2 =  $4 * 5.5 * 3.855 = 84.81 \text{ kg}$

Col 3 =  $11 * 5.5 * 3.855 = 233.2 \text{ kg}$

Col 4 =  $4 * 5.5 * 3.855 = 84.81 \text{ kg}$

Col 5 =  $10 * 5.5 * 3.855 = 212 \text{ kg}$

Col 6 =  $8 * 3.855 * 5.5 = 169.62 \text{ kg}$

Col 7 =  $5 * 3.855 * 5.5 = 106 \text{ kg}$

$$\text{Col 8} = 4 * 5.5 * 3.855 = 84.81\text{kg}$$

$$\text{Col 9} = 6 * 3.855 * 5.5 = 127.2\text{kg}$$

$$\text{Col 10} = 8 * 5.5 * 3.855 = 169.62\text{kg}$$

$$\text{Col 11} = 8 * 3 * 5.5 * 3.855 = 169.62\text{kg}$$

$$\text{Col 12} = 6 * 5.5 * 3.855 = 127.2\text{kg}$$

$$\text{Total of reinforcement amount} = 1484.84 * 2 = 2969.68\text{kg}$$

$$\text{Total of reinforcement amount} = 3\text{ton}$$

First plan

$$F_c = 25\text{mpa}$$

$$\text{Col 1} = 4 * 5.5 * 3.855 = 84.81\text{kg}$$

$$\text{Col 2} = 6 * 5.5 * 3.855 = 127.2\text{kg}$$

$$\text{Col 3} = 14 * 5.5 * 3.855 = 296.8\text{kg}$$

$$\text{Col 4} = 11 * 5.5 * 3.855 = 233.22\text{kg}$$

$$\text{Col 5} = 12 * 5.5 * 3.855 = 254.43\text{kg}$$

$$\text{Col 6} = 20 * 5.5 * 3.855 = 508.86\text{kg}$$

$$\text{Col 7} = 7 * 5.5 * 3.855 = 148.4\text{kg}$$

$$\text{Col 8} = 9 * 5.5 * 3.855 = 190.8\text{kg}$$

$$\text{Col 9} = 15 * 5.5 * 3.855 = 318\text{kg}$$

$$\text{Col 10} = 12 * 5.5 * 3.855 = 254.43\text{kg}$$

$$\text{Col 11} = 10 * 5.5 * 3.855 = 212\text{kg}$$

$$\text{Col 12} = 10 * 5.5 * 3.855 = 212\text{kg}$$

$$\text{Total of reinforcement amount} = 2840.9 * 2 = 5721.1\text{kg}$$

$$\text{Total of reinforcement amount} = 5.75\text{ton}$$

$$F_c = 50\text{mpa}$$

$$\text{Col 1} = 3 * 5.5 * 3.855 = 63.6\text{kg}$$

$$\text{Col 2} = 6 * 5.5 * 3.855 = 127.2 \text{kg}$$

$$\text{Col 3} = 12 * 5.5 * 3.855 = 254.4 \text{kg}$$

$$\text{Col 4} = 9 * 5.5 * 3.855 = 190.82 \text{kg}$$

$$\text{Col 5} = 10 * 5.5 * 3.855 = 212 \text{kg}$$

$$\text{Col 6} = 15 * 5.5 * 3.855 = 318 \text{kg}$$

$$\text{Col 7} = 6 * 5.5 * 3.855 = 127.2 \text{kg}$$

$$\text{Col 8} = 7 * 5.5 * 3.855 = 148.4 \text{kg}$$

$$\text{Col 9} = 14 * 5.5 * 3.855 = 296.8 \text{kg}$$

$$\text{Col 10} = 10 * 5.5 * 3.855 = 212 \text{kg}$$

$$\text{Col 11} = 10 * 5.5 * 3.855 = 212 \text{kg}$$

$$\text{Col 12} = 6 * 5.5 * 3.855 = 127.2 \text{kg}$$

$$\text{Total of reinforcement amount} = 2235.62 * 2 = 4471.24 \text{kg}$$

$$\text{Total of reinforcement amount} = 4.5 \text{ton}$$

.TOTAL OF REINFORCEMENT AMOUNT FOR TWO STORY

$$\text{Total amount} = 6 + 5.75 = 11.75 = 12 \text{ton} \quad \dots \text{fc} = 25 \text{mpa}$$

$$\text{Total cost} = 12 * 850000 = 10200000 \text{ dinar} \quad \dots \text{fc} = 25 \text{mpa}$$

$$\text{Total amount} = 3 + 4.5 = 7.5 = 8 \text{ton} \quad \dots \text{fc} = 50 \text{mpa}$$

$$\text{Total cost} = 8 * 850000 = 6800000 \text{ dinar} \quad \dots \text{fc} = 50 \text{mpa}$$

$$\text{Total difference of reinforcement amount} = 12 - 8 = 4 \text{ton} \quad \text{م.م.}$$

$$\text{Difference of total cost} = 4 * 850000 = 3500000 \text{ dinar}$$

$$\text{Cost of building} = 10200000 + 70000000 = 80200000 \text{ dinar} \quad \dots \text{fc} = 25 \text{mpa}$$

$$\text{Cost of building} = 6800000 + 80 * 10^{10} = 800006800000 \text{ dinar} \quad \dots \text{fc} = 50 \text{mpa}$$